

Design of an Experiment to Evaluate High-Power Rockets as a CubeSat Qualification Platform

Author: Peter Tanner

Supervisor: Dilusha Silva

ATTENTION: THIS IS A DRAFT VERSION. TODO: CHECK CHECKLIST
BEFORE SUBMITTING *This thesis is presented in partial fulfilment of the
requirements for the degree of Bachelor of Philosophy (Honours) at the
University of Western Australia*

Faculty of Engineering and Mathematical Sciences

Word count: TODO:
Submitted: October 16, 2024



1 Abstract

The CubeSat is a type of small satellite, initially conceived reduce the cost access to space to universities due to its small and standardised $10\text{ cm} \times 10\text{ cm} \times 10\text{ cm}$ cubic form factor. The total number of CubeSats launched into space is growing exponentially due to their low cost, doubling every 2.5 y, however the mission success rate has not increased significantly since 2018, levelling off at 75% [1], [2].

Vibration and shock tests are industry standard procedures which aim to emulate launch conditions, however they cannot perfectly replicate them [3]. Testing of CubeSats on suborbital high-power rockets (HPR) is a novel qualification method that can potentially replicate launch conditions more accurately than traditional shaker table tests, and therefore better detect issues and improve the likelihood of mission success. While there have been tests of university CubeSats on high-power rockets [4], there are no direct comparisons to shaker table tests to evaluate their effectiveness as a qualification method.

This paper outlines the construction of a data acquisition system to obtain acceleration data from the HPR launch, the HPR launch and vibration table tests and finally makes a direct comparison of the vibration environment on the HPR launch and vibration table.

2 Acknowledgements

I'd like to thank all the people and organisations who have supported me throughout this project. Dilusha Silva for being a wonderful mentor and for coordinating the project. Michal Zawierta for his expertise flying drones for the drone tests of the CubeSat. Jamir Khan for being a wonderful friend and engineer who worked on the mechanical side of this project, including construction of the high-power rocket, and for putting up with all my delays. Timothy Ludovico for designing the camera payload and being all around wonderful to work with. Jeremy Marelich and AVI for providing their shaker table facilities and conducting the tests. UWA Aerospace for being a wonderful institution who has been with me from first year through my growth as an engineer and has supported me through this project. Space Angel for creating this project and providing expertise and connections to the Indian Institute of Space Science and Technology (IIST). Dr. Priyadarshnam Hari and the Indian Institute of Space Science and Technology for providing their launch expertise and opportunity to launch on POEM. International Space Centre for supporting this project with funding.

Contents

1	Abstract	1
2	Acknowledgements	1
3	List of figures	5
4	List of tables	6
5	Introduction	7
5.1	Background	7
5.2	Problem identification	7
6	Literature Review	8
6.1	Standard satellite qualification methods	8
6.2	Vibration	8
6.2.1	Welch’s method and power spectral density (PSD)	9
6.2.2	Random vibration / sine sweep vibration test	9
6.2.3	Quasi-static acceleration test (QAT)	10
6.3	Vibroacoustic testing	11
6.4	Shock	11
6.5	Rocket testing of CubeSats	12
6.5.1	Sounding rockets	12
6.5.2	High-power rockets (HPR)	14
7	Project overview	16
8	Design group	16
9	Design tools	17
9.1	Altium Designer 24	17
9.1.1	Schematic editor	17
9.1.2	PCB editor	18
9.1.3	Output jobs	18
9.2	circuit.js	19
9.3	LTspice	19
9.4	SolidWorks 2023	19
10	Design process	19
10.1	Identification of constraints and requirements	19
10.1.1	Electrical power system (EPC) requirements and constraints	20
10.1.2	Environmental requirements	20
10.1.3	Physical requirements	20
10.1.4	HPR test requirements	20

10.2	Parts selection and constraints	21
10.2.1	Experimental requirements	21
10.2.2	Other requirements	21
10.3	Selection of components and basic system design	22
10.4	Implementation of parts into design	28
10.5	Preliminary testing	31
11	Design evaluation framework	32
11.1	Environmental testing	32
11.1.1	High-temperature test	32
11.1.2	Low-temperature test	33
11.1.3	Shaker table test	33
11.1.4	Drone test flights	34
11.1.5	High-power rocket test flight	35
11.2	Evaluation of accelerometers	35
12	First revision of test and POEM emulation electronics	35
12.1	On-board data handling (OBDH)	35
12.2	Accelerometers	35
12.3	Electrical power system (EPS)	36
12.4	Telemetry and command	36
12.5	GNSS Tracking	36
12.6	Drone testing	37
12.7	Results	37
13	Second revision of test and POEM emulation electronics	38
13.1	On-board data handling (OBDH)	38
13.2	Accelerometers	38
13.3	Electrical power system (EPS)	38
13.4	Telemetry and command	38
13.5	GNSS Tracking	38
14	High-Power Rocket	38
14.1	Simulation	39
14.1.1	Flight profile	39
14.1.2	Stability	40
14.1.3	Acceleration	41
15	Vibration table testing	43
15.1	AVI vibration table test setup	43
16	Rocket test	43

17 Drone tests	43
17.1 First test	43
17.2 Second test	43
18 Data collection and analysis	43
18.1 Shock	43
18.1.1 Vibration table results	43
18.1.2 HPR results	43
18.1.3 Comparison of methods	43
18.2 Random	43
18.2.1 Vibration table results	43
18.2.2 HPR results	43
18.2.3 Comparison of methods	43
18.3 Quasi-static acceleration	44
18.3.1 Vibration table results	44
18.3.2 HPR results	44
18.3.3 Comparison of methods	44
19 Conclusion	44
19.1 Future work	44
20 References	44
21 Appendix	48

3 List of figures

1	Random vibration test [13]	9
2	Quasi-static acceleration test. The input profile high acceleration from 20 Hz to 21 Hz, resulting in the response having a force of 10.8 <i>g</i> acceleration around this frequency [13]	10
3	Coupled loads model [17]	11
4	Shock response spectrum of and time-domain shock response. Left: near-field (close to shock source). Right: far-field (distant from shock source) [20]	12
5	Acceleration in time domain (Left), Angular velocity in time domain (Right) during the launch of FloripaSat-I [8]	13
6	Random vibration (Left) and sine sweep (Right) tests on a shaker table during the qualification of FloripaSat-I [8]	13
7	Typical launch of a single stage high-power rocket	15
8	Shock response spectrum from computer modelling of an igniter based on the low explosive aluminium potassium perchlorate [24]	16
9	Responsibilities of members on the CubeSat design project and the information required to be communicated between each member.	17
10	Example of the hierarchical schematic sheet format for the main DAQ PCB.	18
11	Block diagram of the CubeSat, including connections to the camera payload and ground station over radio downlink.	28
12	Workflow for integrating a design into a PCB.	29
13	High-temperature testing setup	32
14	Low-temperature testing setup	33
16	OpenRocket diagram of UNO.	39
17	Flight profile of UNO using a K1100T motor. Simulated in OpenRocket.	40
18	Stability of UNO using a K1100T motor. Simulated in OpenRocket.	41
19	Acceleration of UNO using a K1100T motor over (top) the whole flight and (bottom) the thrust phase. Simulated in OpenRocket.	42
15	IIST recommended random vibration test profile for qualification of CubeSat for launch on POEM (profile defined in 4).	49

4 List of tables

1	Comparison of 1S and 2S battery packs.	23
2	Operating voltage and current consumption of devices connected to EPC.	24
3	Stackup of each PCB	30
4	IIST recommended random vibration test profile for qualification of CubeSat for launch on POEM.	34
5	Vibration Data: Longitudinal and Lateral Details with Sweep Rate and Axis Merged	34
6	IIST recommended shock test profile for qualification of CubeSat for launch on POEM.	34
7	Data sources and their data rates.	37
8	CrystalDiskMark benchmark of DAQ v1.	38
9	Rocket motor impulse classes [47]	39

5 Introduction

5.1 Background

The University of Western Australia (UWA) Microelectronics Research Group (MRG) is developing a 2U CubeSat to measure the health of vegetation through an infrared camera array [5]. The CubeSat is a type of small satellite designed to reduce the cost of access to space for universities and space startups due to its small and standardised 10 cm \times 10 cm \times 10 cm cube form factor. This CubeSat will launch on an Indian Polar Satellite Launch Vehicle (PSLV) in the PSLV Orbital Experiment module (POEM), which will host multiple CubeSats in orbit and will provide services including power and communications to the CubeSat.

The total number of CubeSats launched into space is growing exponentially due to their low cost, doubling every 2.5 y, however the mission success rate has not increased significantly since 2018, levelling off at 75% [1], [2], which implies a need for novel qualification methods. For most single-launch satellites, increased testing is the optimal strategy to minimise failure [2]. Qualification of the CubeSat is required to maximise mission success and is required by the launch provider to minimise the risk of damage to the launch vehicle or other payloads. The MRG is planning to qualify this CubeSat on a suborbital high-power rocket (HPR) in combination with traditional vibration and shock tests on a single degree of freedom (SDOF) electrodynamic shaker table.

Vibration and shock testing are typical tests for CubeSats which are intended to replicate the conditions of launch [1]. Despite their widespread use, SDOF vibration and shock tests do not perfectly replicate the conditions at launch as [3], [6]:

1. The peak flight responses are not able to be achieved since a vibration table cannot simulate steady-state thrust forces since they only can simulate dynamic forces [3].
2. A SDOF test can only excite one axis at a time which is not representative of the launch environment [3], [6].
3. A vibration table tests a "fixed-base" case which has different modes compared to the case where the satellite is fixed to the launch vehicle [3].

A HPR has a higher total impulse than model rockets but a lower impulse than sounding rockets, with a range of 36 Ns up to 163 840 Ns, and have a sub-orbital trajectory unlike COTS launch vehicles [7]. Suborbital rockets have been used for testing several CubeSats [8], [9], however this qualification method is not in widespread use in the industry.

5.2 Problem identification

For institutions with limited budget, shock and random vibration tests using a SDOF vibration table is the current state of the art (SOTA) method for qualification. HPRs are a potential qualification method which can complement SDOF vibration tests, however there is no prior studies comparing both HPRs and SDOF vibration tests against the

qualification level set by the launch provider. If HPRs can produce a vibration environment similar to the qualification level, HPRs may be a useful complement to SDOF vibration tests and may be useful in increasing mission success rates.

Since HPRs have not been frequently used as a test platform, another issue is the lack of tooling for making HPRs an effective test platform. This research will involve design and evaluation of a combined test and data acquisition platform which:

1. Measures the vibration response of the rocket on the CubeSat required for evaluating the HPR platform and
2. Provides the same power and communications services as the POEM to ensure the payload-under-test has access to the same environment as on launch.

6 Literature Review

This literature review will cover the current testing methods used in CubeSats, the use of suborbital rockets as a qualification method and cover the types of sensors and systems required to record these tests.

6.1 Standard satellite qualification methods

Satellites undergo a panel of qualification tests to maximise the chance of mission success, and may be required by the launch provider to demonstrate that there is minimal risk of the satellite to the launch vehicle and other payloads which may be present. There are multiple satellite qualification standards, an example is the NASA General Environmental Verification Specification (GEVS) which is a panel of tests including electromagnetic compatibility (EMC), thermal, acoustic and vibration tests that are required for all NASA Goddard Space Flight Center projects [10]. Other standards include ISO-15864, JERG-2-002, NASA-STD-7002A, ECSS-E-ST-10-03C and SMC-S-01 [11]. While these standards have flight heritage, being used on many successful payloads, they were designed for medium or large satellites, and therefore fully complying with these standards are out of the budget of most university CubeSat programs [11]. While is no widely used test standard for CubeSats currently in use, since most CubeSat projects perform the minimum panel of tests required by the launch provider to minimise cost, there is a de facto minimum series of tests which are random vibration, shock and thermal vacuum testing [1].

6.2 Vibration

Vibrations are experienced by satellites during transportation and loading, and most prominently during launch [12]. The purpose of vibration testing is to ensure that the satellite will survive transportation and launch conditions, and to find workmanship errors [3], [12].

6.2.1 Welch’s method and power spectral density (PSD)

6.2.2 Random vibration / sine sweep vibration test

In the random vibration test, a uniform vibration spectrum is applied to the satellite which tests all the resonant frequencies of the satellite [13]. This range includes frequencies on the magnitude of 100 Hz, since higher frequencies couple to the satellite through acoustic means rather than through the structure [3]. A sine sweep vibration test is similar, but instead of the frequency being randomly sampled it is swept through sequentially from either low to high frequency or vice versa. An example of a random vibration test is shown in figure 1, where frequencies up to 100 Hz were evaluated, and higher frequencies above 100 Hz were attenuated proportional to frequency.

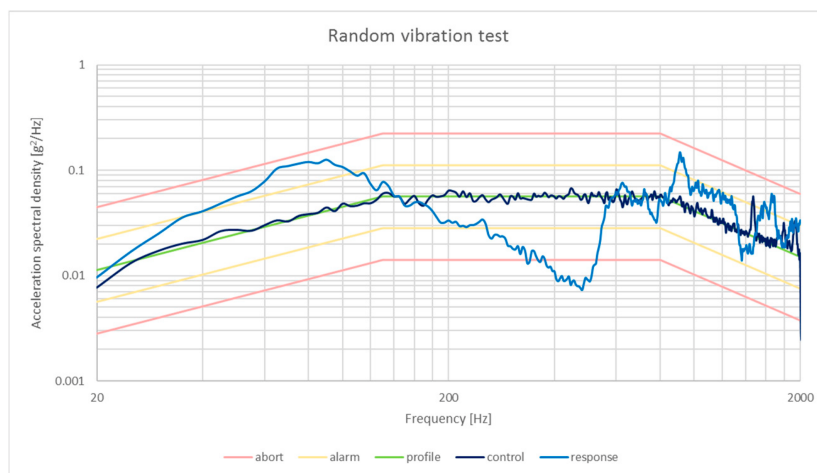


Figure 1: Random vibration test [13]

The limitations of random vibration tests is that the shaker and table will have different modes than the launch vehicle and payload mount, resulting in the test response not perfectly matching the flight response [3], [14]. Gordon and Kern argue that this difference is not a factor in practice since shaker tests are ”not intended to be a strength test” [3, p. 7] and that components ”should have been strength qualified prior to integration” [3, p. 7]. Component level is argued as a best practice in the CubeSat community [15], however some argue that component level testing is not suited to the short timeline of university CubeSat projects and that more effort should be put into integration testing [16]. If a testing program focuses on integration testing, then this mismatch between shaker table and flight response could result in the CubeSat not being properly qualified.

Finally, although 6 degrees of freedom (DOF) vibration tables exist which can replicate the vibrations experienced in all dimensions during launch, most satellites are still tested with single-axis or random input shakers which only provide one dimension [3], [6], [14]. While Gordon and Kern [3] state that these limitations are adequately managed by testing in all three orthogonal axes separately, Aglietti and Nath [6] created a model

of three, two and single axis vibration tests and found that to match the 3 DOF response with a single DOF table, the satellite needed to be subjected to 2.5 times the g_{rms} forces than in 3 DOF testing, leading to the satellite being over designed [6].

6.2.3 Quasi-static acceleration test (QAT)

A quasi-static test replicates the liftoff stage of flight, where there is a combination of random vibration from engines and quasi-static axial acceleration from the engine and other external forces on the launch vehicle [12], [13], which are approximated as constant forces at selected frequencies as shown in figure 2. The QAT is usually compared to results from coupled loads analysis, where all forces are assumed to be applied to the satellite through the launch vehicle as shown in figure 3 [17].

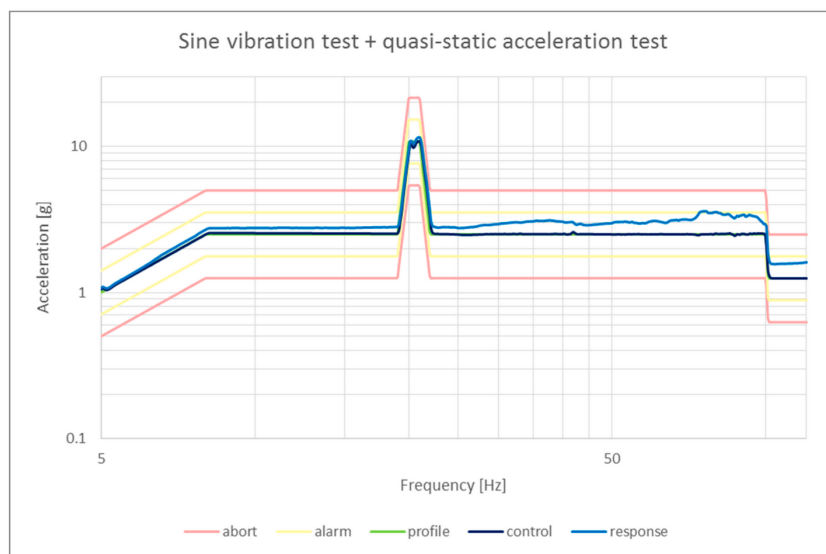


Figure 2: Quasi-static acceleration test. The input profile high acceleration from 20 Hz to 21 Hz, resulting in the response having a force of 10.8 g acceleration around this frequency [13]

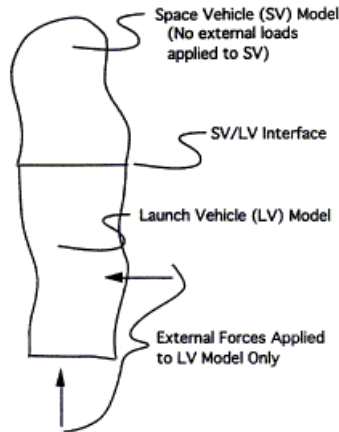


Figure 3: Coupled loads model [17]

The first limitation of a quasi-static acceleration test is that the shaker table cannot apply the peak response evenly on the CubeSat that is predicted by coupled loads analysis (CLA) [3]. Again, Gordon and Kern state that these limitations are addressed by component-level strength qualification. They also state that applying the peak response evenly is not necessary, since if an item does not fail, the correctly applying the response evenly does not greatly increase its likelihood of failing [3]. The second limitation is there is a difference in modes, since a quasi-static acceleration test also contains random vibrations [3].

6.3 Vibroacoustic testing

As stated, low frequency vibrations from 0 Hz to 100 Hz tend to couple well through the payload mount, however high frequency vibrations above 100 Hz are more efficiently imparted on the satellite acoustically [3]. These acoustic loads have an effect on payload electronics [18], and primarily originate from the highly turbulent engine exhaust [18].

Vibroacoustic testing is not necessary for CubeSats due to their small surface area [10], since the magnitude of the acoustic response is proportional to the satellite's surface area to mass ratio [12], therefore the effect of the acoustic loads is negligible. Instead, vibroacoustic testing is more relevant for large and light payloads such as solar panel arrays [12], therefore it will not be part of this research.

6.4 Shock

Shock is experienced by satellites when pyrotechnics are detonated or deflagrated during events such as staging and ignition, the response appears as a range of decaying sinusoids in the 100 Hz to 10 kHz frequency range [12], which decay in 5 ms to 15 ms [12]. The spectrum extends up to 40 kHz, however for analysis frequencies above 10 kHz are assumed to be non-damaging [19], [20]. Pyroshock may cause peak accelerations of up

to 10000 g [20]. High explosives are primarily used for explosive elements on rockets in combination with some low explosives for initiators [19].

Shock is tested using a shock-generating device which is applied to the satellite along all three axes [10], [20], the shock generating device for a CubeSat can be an electrodynamic shaker table [13] with a half-sine, pulse profile [13]. The shock test has similar limitations as the random vibration test, since it also uses a vibration table to affect the satellite.

Shock tests are compared using the shock response spectrum (SRS), which plots the maximum acceleration per frequency bin. The SRS contains an octave slope which rises to the first resonant frequency called the "knee frequency". The octave slope can be approximately 9 dB/octave to 12 dB/octave depending on distance to the source.

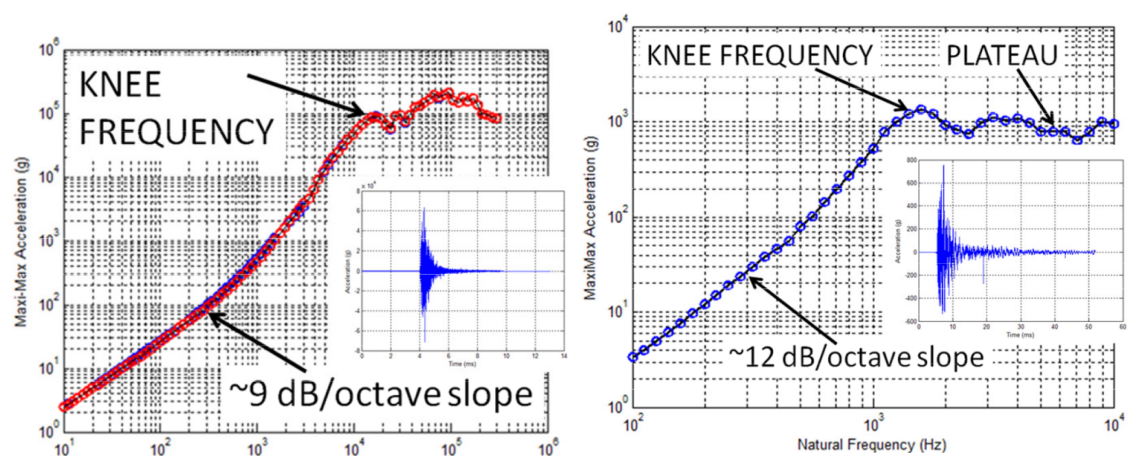


Figure 4: Shock response spectrum of and time-domain shock response. Left: near-field (close to shock source). Right: far-field (distant from shock source) [20]

6.5 Rocket testing of CubeSats

6.5.1 Sounding rockets

Sounding rockets are a class of suborbital rocket used between 40 km and 200 km, above where weather balloons operate [21]. While sounding rockets have been used to launch many CubeSats as the primary launch vehicle for suborbital CubeSat missions, such as in the REXUS-25 mission [22], there has been only one published instance of sounding rockets being used as an additional qualification platform for a CubeSat [4]. The FloripaSat-I CubeSat was tested on a VSB-30 sounding rocket [4] to qualify the CubeSat under launch conditions. This qualification method was intended not to replace, but to complement standard vibration and shock qualification methods [4]. The test measured these launch conditions through the MPU6050 6 DOF inertial measurement unit (IMU) [4].

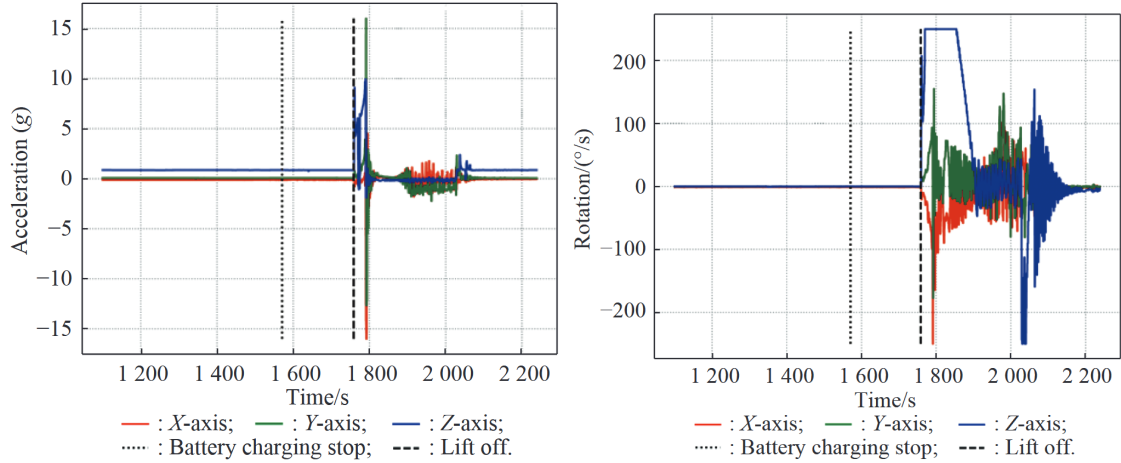


Figure 5: Acceleration in time domain (Left), Angular velocity in time domain (Right) during the launch of FloripaSat-I [8]

While this study does show the time-domain accelerometer and gyroscope measurements from the sounding rocket launch in figure 5, it does not compare the data to other qualification tests in the FloripaSat-I campaign, such as traditional vibration and shock testing. Additionally, the launch data was not presented in the frequency domain through the boost and coast phases of the flight, meaning they could not be compared to the acceleration spectra which was shown for the shaker table testing in figure 6.5.1.

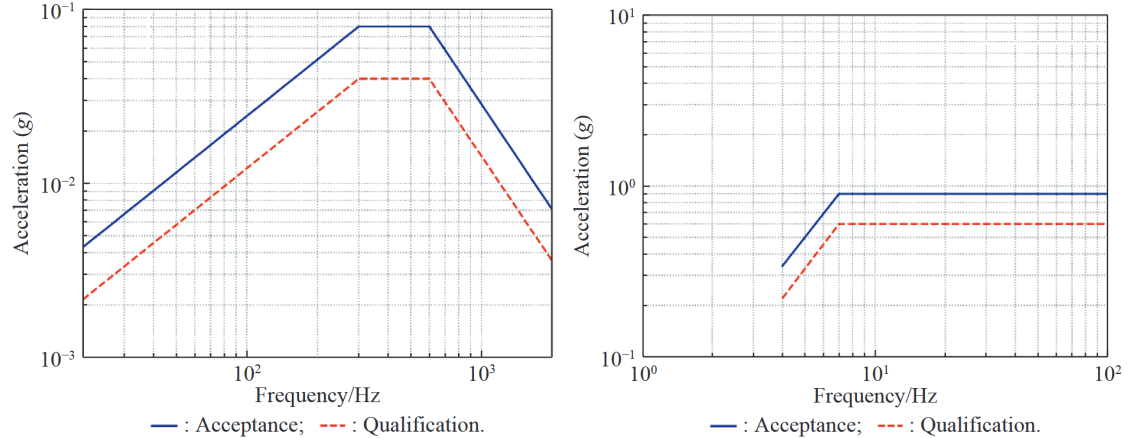


Figure 6: Random vibration (Left) and sine sweep (Right) tests on a shaker table during the qualification of FloripaSat-I [8]

Another shortcoming of the study is that a shock test using a half-sine pulse was not performed. The use of a sounding rocket is a potential method of qualifying the CubeSat's ability to tolerate shocks since there will be shock events when pyrotechnics

are lit to stage the rocket, although the forces will have intensity than on a larger launch vehicle.

6.5.2 High-power rockets (HPR)

While sounding rockets have a significantly lower cost compared to an orbital-class launch vehicle, they cost \$1 million USD per launch to launch 200 kg on average **jurist2009COTS**, resulting in a specific cost of \$5000 USD/kg, which is still a large amount for university CubeSat programs. High-power rockets (HPR) are a lower-performance but cheaper alternative to sounding rockets, which can leverage the design expertise of university rocketry teams while having similar qualification potential as sounding rockets. A single stage level 3 certification rocket can reach altitudes above 10 000 ft [23] for a cost of only \$1200 USD [23]. Despite the potential cost benefits, there have not been any published instances of a HPR being used to qualify a CubeSat.

The typical phases of a HPR launch are

- Boost phase: The HPR is being powered by a solid rocket motor. In most HPR launches, this phase only lasts several seconds at maximum.
- Coast phase: After the rocket motor burns out and produces no thrust the rocket coasts up on a ballistic trajectory to the maximum altitude (the apogee).
- Apogee: This is the maximum altitude the rocket will reach. At this point the drogue parachute is deployed, which limits the rocket's descent velocity to a reasonable rate
- Main parachute deployment: At a fixed altitude above ground level the main parachute is deployed. This parachute has a higher surface area than the drogue chute and slows the rocket down to a safe landing velocity. A main parachute should not be deployed at apogee since this would result in the rocket drifting further which complicates recovery efforts.
- Landing: The rocket lands on the ground and is recovered by the rocketry team for safing (disarming of live energetics) and transportation. While the landing occurs minutes after launch, finding the rocket is a harder task and may occur hours after landing.

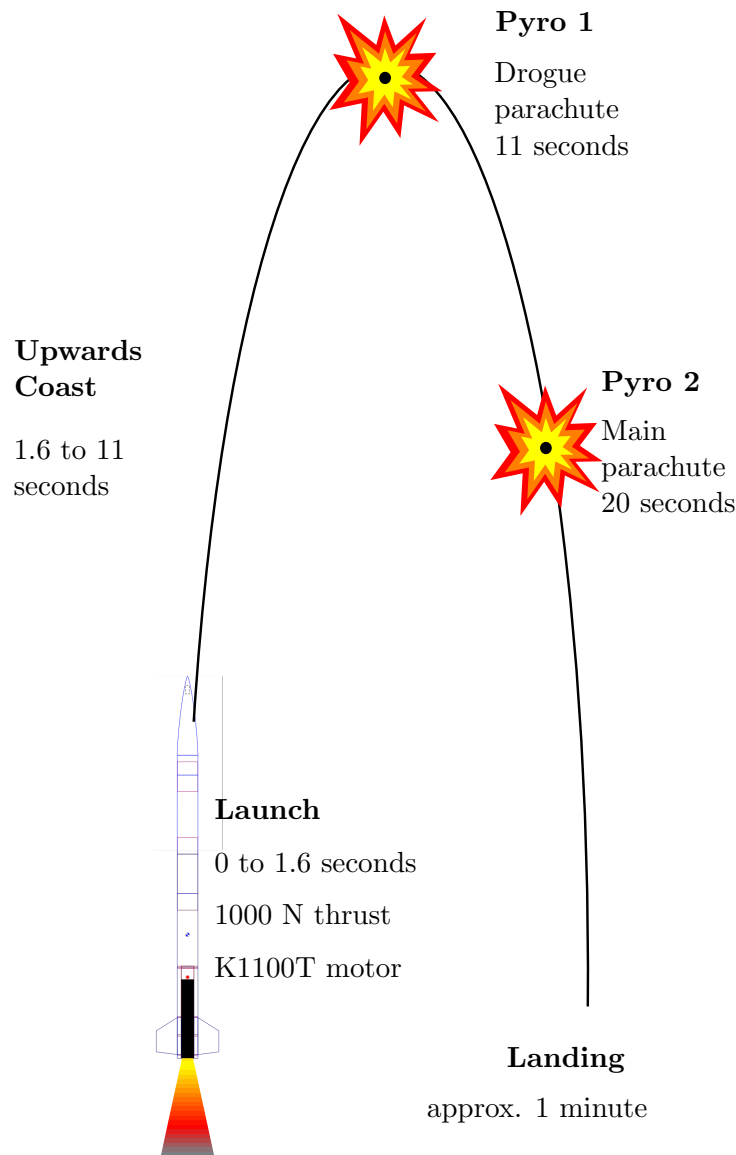


Figure 7: Typical launch of a single stage high-power rocket

One potential issue with HPRs as a qualification platform for shock is that low explosive black powder is used [23] which has different explosive characteristics, such as a subsonic flame front, compared to the high-explosives used in launch vehicles [19] and will therefore produce different shock responses. One study [24] performed finite element analysis of igniters filled with low explosives including aluminium potassium perchlorate and boron potassium nitrate and determined the SRS, shown in figure 8. Compared to the SRS of high-explosives in figure 4, where at a frequency of 1 kHz the acceleration is over $10^2 g$ [20], in these low explosive simulations the acceleration at 1 kHz is only 10^1

g [24]. Therefore, it is hypothesised that HPRs will not be useful for shock qualification since the response of low explosives is different from the high explosives used on launch vehicles.

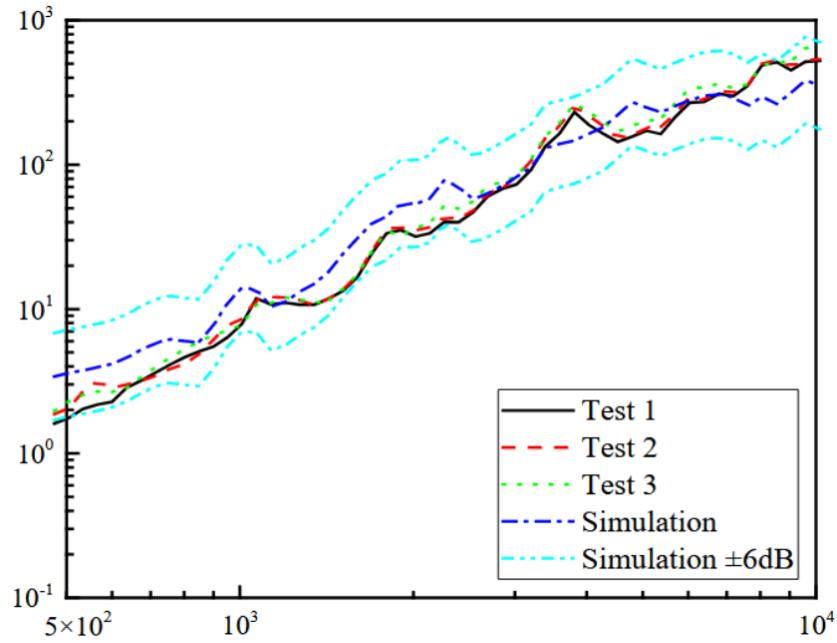


Figure 8: Shock response spectrum from computer modelling of an igniter based on the low explosive aluminium potassium perchlorate [24]

7 Project overview

8 Design group

The CubeSat design group was made of Peter Tanner, Jamir Khan and Timothy Ludovico. As shown in figure 9, each person is working on a unique part of the CubeSat and requires specific information to be communicated.

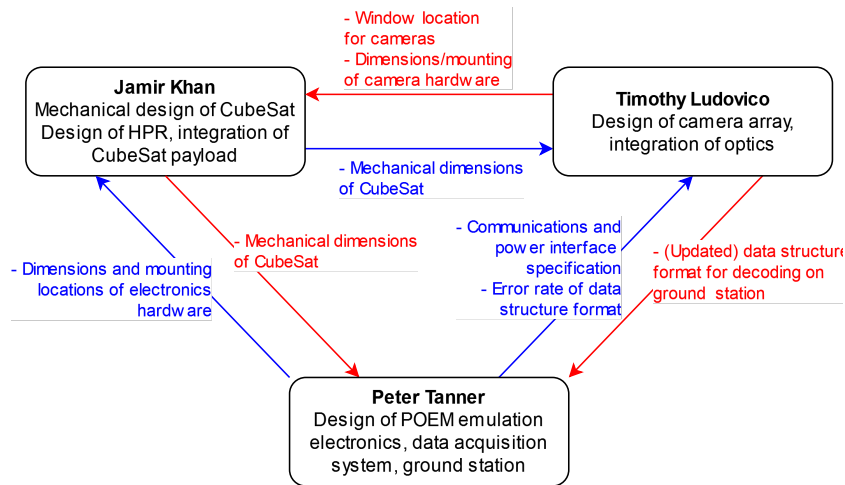


Figure 9: Responsibilities of members on the CubeSat design project and the information required to be communicated between each member.

9 Design tools

9.1 Altium Designer 24

Altium Designer is an electronics design automation (EDA) tool which is widely used in industry and has been used for design of CubeSat and space hardware [25]. The author chose to use Altium Designer over other EDA tools since they were familiar with this tool having used it in previous projects, which minimises development time.

The design flow in Altium designer is as follows:

9.1.1 Schematic editor

A circuit is first implemented using schematic symbol representations of components in the schematic editor. In the schematic view the connections between the components are abstracted using net labels and wires. The schematic view does not necessarily represent the physical layout of the PCB but is intended to convey the connections between components in a format that can easily be read.

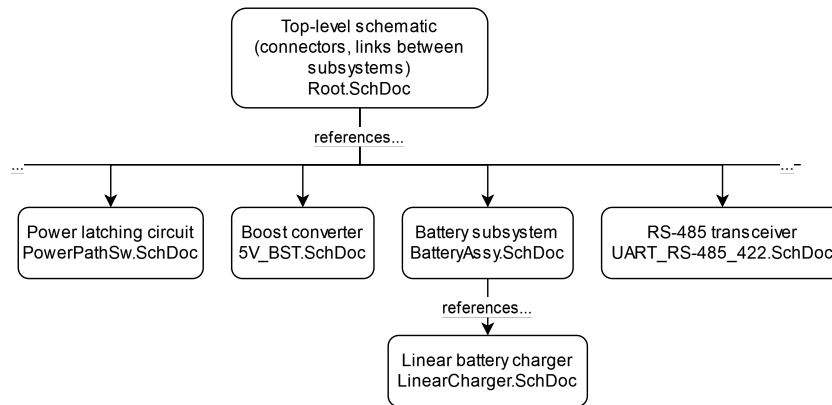


Figure 10: Example of the hierarchical schematic sheet format for the main DAQ PCB.

A root schematic contains references to other schematics which are abstracted as sheet symbols with ports. Each sheet symbol represents a particular subsystem of the DAQ. The hierarchical sheet symbol representation has several benefits, including that it facilitates reuse of designs and allows larger systems to be decomposed into multiple schematics which are easier to modify and read. This is shown in figure 10.

9.1.2 PCB editor

Each schematic symbol is a component which links the symbol to a footprint. The footprint is the physical representation of the component and contains information such as

- The land pattern, which is the layout of pads or holes required for mounting the component on the PCB,
- The component's 3d model

The PCB editor contains automated design rule check (DRC) tools which is used in the design process to reduce the likelihood of a faulty PCB. The DRC uses rules set in the project and if a rule is violated, it is reported. This feature is used for example to ensure that microwave-frequency tracks have the correct geometry for impedance matching.

9.1.3 Output jobs

Once a PCB is ready to be manufactured, an automated "outjob" ensures that the required design files are automatically generated with the right settings for manufacturing. The files generated include:

- Bill of materials
- Gerber files
- Drill location files

- Pick-and-place component locations

The outjob feature prevents errors such as misconfiguration of output files.

9.2 circuit.js

Circuit.js is a simple browser-based analog circuit simulator [26]. Circuits in this simulator can be edited and interacted with in real-time, whereas in traditional SPICE simulators the circuit cannot be edited once the simulation starts. Circuit.js uses a numerical method which is prone to error however, therefore this simulator was used for rapid, real-time prototyping of designs. After these designs were finalised they were simulated in traditional SPICE-based simulators.

9.3 LTspice

The simulation of components is done using LTspice, a freeware circuit simulator which uses the SPICE method

LTspice was used to the DC-DC boost converter for this project, which was required to power the internal DAQ systems and the payload. A simulation was performed to characterise the ripple voltage and to validate its performance over a range of input voltages. LTspice has been used for simulation of boost converters in the past and is free which makes it a suitable circuit simulator for this project [27].

Ultimately LTspice was chosen over other freeware SPICE simulators such as PSpice since LTspice contains an "alternate" solver which has less error at the trade-off of simulation time [28]. The reduced error results in the solver converging on a solution, whereas in PSpice or in LTspice normal solver mode it was not able to converge on a solution and the simulation could not be completed.

9.4 SolidWorks 2023

SolidWorks is a mechanical CAD software which is used for creating 3d models of the electronics hardware by using the Altium Designer plugin. These 3d models are required for Jamir to complete the mechanical design of the CubeSat and to verify good mounting of the electronic hardware.

10 Design process

10.1 Identification of constraints and requirements

The beginning of the design process involves identification of constraints and requirements.

The ultimate goal of this testing campaign is to receive at least one image from the camera payload from a drone or HPR flight, and launch on the POEM and receive at least one image from orbit. The POEM will remain in low Earth orbit (LEO) for 6 months [29].

10.1.1 Electrical power system (EPC) requirements and constraints

Battery life POEM outputs a consistent amount of power to each CubeSat while on orbit due to its solar panels and battery system, however in the tests it will not be possible to deploy a solar panel therefore the DAQ system must have adequate battery life to power the camera payload throughout the length of the test.

Voltage and current A requirement of the EPC on the DAQ is to emulate the voltage and current provided by the POEM to one CubeSat to facilitate testing of the camera payload's power electronics. POEM contains a 28 V and 42 V bus, however IIST has informed the design team that a 5 V connection with a maximum current of 1.5 A is provided to CubeSats, with the option to expand to 3 A. The EPC will have to emulate at least one of these power busses.

10.1.2 Environmental requirements

It is possible a future version of this payload will fly with the camera payload on POEM to make a direct comparison between the vibration environment on POEM to the conditions on both a HPR and the shaker table tests. Therefore, the DAQ must go through the same qualification campaign as the camera payload.

Shock, random vibration, sine-sweep test pass The DAQ must remain functional during the vibration environment of the rocket. This means it must pass the IIST recommended qualification procedure, which involves shock, random vibration and sine-sweep tests. These tests are described in more detail in section 11.1.3 Shaker table test.

Cold and hot temperature test pass The DAQ must be able to survive at temperatures of -20°C to 80°C as described in section 11.1.1 High-temperature test and section 11.1.2 Low-temperature test. This will influence the components that can be used.

10.1.3 Physical requirements

Physical dimensions The DAQ must have physical dimensions that allow it to fit within the inside space of a 1U CubeSat.

10.1.4 HPR test requirements

GNSS tracking In the original plan, the HPR will launch to a high altitude and may drift away from the launch site. Tracking of the CubeSat will be required to ensure recovery.

Radio link range One of the key requirements stated was receiving one image from a drone or HPR flight. This requires a stable radio link with a protocol that allows the received image to be recognisable even if the link degrades.

10.2 Parts selection and constraints

The first part of the design process is to obtain a list of constraints and requirements for the DAQ system, and from these constraints choose appropriate components to achieve the requirements.

The small payload size and recovery sequence of the HPR presents unique constraints for this data acquisition system, which prevented the use of COTS off the shelf (COTS) DAQs and sensors.

10.2.1 Experimental requirements

This project in addition to design of a DAQ involves design of an experiment to evaluate both HPR launches and shaker tables as comparable qualification platforms to the IIST recommended qualification level.

Sampling rate The accelerometers used must be able to sample at twice the frequency bandwidth of the tests. This is to avoid sampling according to the Nyquist criterion.

Maximum measurable acceleration Pyroshock events and motor launch are high- g events that require accelerometers with measurement scales above these events, otherwise they will saturate at the maximum scale.

10.2.2 Other requirements

2024 Australian Universities Rocket Competition (AURC) regulations This payload was intended to fly on the UWA Aerospace rocket *Svengeance* in the AURC 2024 competition, as part of a collaboration with UWA Aerospace. AURC has additional rules for electronics systems, relevant rules include (but not limited to) [30]:

- Lithium-polymer batteries are not allowed (unless using COTS equipment)
- Connectors must have a positive locking mechanism
- Electronics must be mounted using rigid fixing methods

Budget The cost of the DAQ system must not exceed A\$1500.

Time The project must be completed before the end of semester 2 2024 (October 18, 2024)

10.3 Selection of components and basic system design

The constraints in section 10.1 Identification of constraints and requirements will determine the parts that are appropriate for the design. A basic system design was created, since some components depend on how others are configured: for example, using the batteries in parallel requires additional balancing components to be selected in this stage.

Selection of electronic parts must also account for availability at the following suppliers. Parts will not be sourced from other suppliers for reasons including high minimum order quantities or counterfeit components.

1. JLCPCB
2. Mouser
3. DigiKey

JLCPCB is a PCB manufacturing service that will be used to manufacture the PCBs for this project. In addition to manufacturing they provide a service to automatically place and solder components to the PCBs. This component source has advantages over component distributors as they:

- automatically place components, which reduces assembly time and reduces risk of poor soldering compared to manual assembly
- price components at a lower cost that is closer to the wholesale price compared to component distributors

JLCPCB cannot be used for expensive components that need fine control over the amount being purchased, since JLCPCB can only provide component assembly for either two full board or five full boards. Additionally, some components cannot be sourced on JLCPCB. This is the case with the chosen GNSS receiver, which has a very high unit price and should not be assembled on all five boards, and is not available in the JLCPCB catalogue.

Mouser and DigiKey are component distributors which allow the purchasing of individual components, with a higher markup compared to JLCPCB. If a part cannot be purchased from JLCPCB for any reason, it will be purchased from Mouser or DigiKey and manually assembled.

Battery selection COTS 18650 lithium-ion batteries were chosen as the energy source for the DAQ. Advantages of this battery format include:

- The 18650 format encases the battery in a rigid metal cylinder which is well-suited for the space environment [31]. Battery formats which use a flexible pouch, like most lithium-polymer cells, are more prone to outgassing in the vacuum of space [31].

- Compared to other rechargeable battery solutions such as Ni-Cd and Ni-H₂, Li-ion batteries have improved temperature range, energy density and specific energy and cycle life [32].
- COTS Li-ionbatteries are a mature battery format due to widespread use in consumer products [32].
- Extensive flight heritage as they have been proven in other CubeSat missions [31], and are being used on flagship NASA missions, such as Europa Clipper [33].
- Low cost as they are COTS grade and are already produced at scale.

Manufacturers produce a variety of types of Li-ionbatteries with different chemistries, which affect parameters including internal resistance, discharge and charging temperature range and capacity.

The Samsung INR18650-25R Li-ionbattery was chosen for the DAQ platform due to

- Previous flight heritage on CubeSats [34].
- Operation over a large temperature range of $-20\text{ }^{\circ}\text{C}$ to $75\text{ }^{\circ}\text{C}$ and has been proven to be stable at $130\text{ }^{\circ}\text{C}$ [35].
- Good capacity of 2500 mA h and high maximum discharge rate of 20 A.

Power electronics Power electronics are used to stabilise the battery voltage, since each series Li-ionbattery may have a voltage ranging from 2.5 V to 4.2 V over one discharge cycle.

Two cell configurations were considered for this project:

- 1S3P (one set of 3 batteries in parallel).
- 2S2P (two sets of 2 batteries in parallel, each set connected in series).

Category	1S	2S
Nominal voltage	3.6 V	7.2 V
Power loss	Higher I^2R losses	Lower I^2R losses
Components required for 5 V output	Boost converter	Buck converter and balancing circuitry
Cost of system	Lower due to lack of balancing	Higher due to balancing circuitry

Table 1: Comparison of 1S and 2S battery packs.

A series battery pack would make sense if the electronics operate on a higher voltage (for example, if there are motors or high-power radios). However, in this application the highest voltage used is 5 V and the I^2R losses between the battery and the power

converters is low since they are integrated on the same board. A power system using 2S batteries results in a cost of A\$10 for power electronics whereas a 1S system only requires A\$2 in power electronics.

Three batteries were placed in parallel to form a 1S3P battery pack, this configuration was chosen as it simplifies the charging circuitry by removing the need for cell balancing circuitry that is required for series battery packs, which reduces cost and simplifies the design. Three cells were selected since this

Item	Voltage (V)	Unit current (mA)	Quantity	Current (mA)
Payload-under-test	5	3000 (Max.)	1	3000 (Max.)
Pi Zero	5		1	
NEO-M9N	3.3		1	
ZED-F9P	3.3		1	
LSM6DSOX	3.3		2	
ADXL375	3.3		2	
E32-900M30S	3.3		1	
Total (5 V)	-	-	-	
Total (3.3 V)	-	-	-	

Table 2: Operating voltage and current consumption of devices connected to EPC.

The Texas Instruments TPS61022 boost converter was selected for this 1S system. It has a working voltage range of 1.8 V to 5.5 V which is suitable for a 1S3P Li-ionbattery pack with a working voltage range of 2.5 V to 4.2 V, a maximum output current of over 3 A and can be configured to have an output voltage of 5 V which is ideal for the DAQ and the camera payload [36]. A DC-DC switching converter was selected since it has high efficiency above 90% throughout the input voltage of a standard 1S battery pack [36]. The TPS61022 has an operating temperature range of -40°C to 150°C which is adequate for thermal qualification [36].

As the current used by the 3.3 V system is only 0 mA a linear regulator was chosen. This solution results in a small power loss of 0 mW of power loss. An Advanced Monolithic Systems AMS1117-3.3 linear regulator was chosen due to its cheap pricing on JLCPCB of only A\$0.20 and since it has been used in past designs with success. It has a high dropout voltage of 1.1 V, which is acceptable for the 5 V input [37]. The AMS1117 has an operating temperature range of -40°C to 125°C which is adequate for thermal qualification [37].

Onboard data handling unit (OBDH) The OBDH unit acquires data from sensors and the payload and saves it to a storage device and relays relevant data to the ground station through the radio. The two main requirements of the OBDH is that it has enough resources to be able to process and save the sensor and payload data without losing data, and that it has adequate storage to hold sensor data from one HPR flight.

A first revision of the DAQ used an STM32L476 microcontroller, which had similar peripherals, including UART, I²C and SPI, however as a microcontroller it does not have

an operating system and does not have significant storage. Storage was provided in the form of a 4 GB embedded multimedia card (eMMC) chip, which was chosen since it is directly soldered to the PCB and should be more resistant to vibration than a micro SD card connector.

Due to the issues encountered with the first revision and due to the time constraints, the second revision uses a Raspberry Pi Zero W v1.3 (referred to as "Pi Zero"). This is a development board which integrates the BCM2835 Broadcom system on chip (SoC), 512 MB of RAM and contains a micro-SD card slot, USB interface and peripherals such as UART, I²C and SPI [38]. This board was chosen due to its small form-factor compared to larger Raspberry Pis, simplicity of integration compared to the Raspberry Pi compute modules and low cost. The Raspberry Pi platform has been used in low-cost low Earth orbit (LEO) CubeSat applications [39]. It is predicted that in polar orbits that the Pi Zero has a lifespan of 5 years [39], which is adequate for this project since the POEM will cease to maintain its orbit after months. The thermal performance of a Raspberry Pi Zero W is adequate for space applications [39]. While a Raspberry Pi Zero 2W was initially selected, which would have had higher performance compared to the Zero v1.3, it was not possible to acquire one due to supply chain issues.

Typically, a Raspberry Pi runs the Raspbian operating system (OS), which is a Debian fork [38]. Compared to developing for a microcontroller, an OS is easier to develop for as it allows the use of standard Linux utilities for interacting with the system, including `ssh` for remote control, and having each DAQ task in a separate process with separated memory makes debugging easier. This ease of development was required to meet the time constraint of the project.

Due to limitations of the BCM2835 SoC only one hardware UART is available [38], but more are required for receiving data from GNSS receivers. Receiving data through a software implementation of UART is not ideal since it uses a large amount of CPU resources and is prone to missing bits especially on the non realtime OS of the Raspberry Pi which severely limits its usable baud rate. The XR20M1172 dual hardware UART to add more UART ports to the Raspberry Pi through the SPI bus. This UART has a 64-byte first-in first-out (FIFO) buffer and interrupts, which eliminates the need for expensive polling, and has a maximum data rate of 16 Mbit s^{-1} , which is more than adequate for GNSS data [40] which has a maximum baud rate of only 38 400 bd. This UART has a temperature range of -40°C to 85°C , allowing it to survive temperature testing.

Radio downlink The POEM contains a radio downlink which allows experiments to transmit data to the ground at a speed of 5 kbit s^{-1} . The radio cannot be used to control the CubeSats from the ground.

The RFD900x radio transceiver was used to emulate this POEM service. This transceiver uses the 915 MHz industrial, scientific and medical (ISM) band and transmits with a maximum power of 1 W using a frequency hopping spread spectrum (FHSS) technique [41]. Data rates from 12 kbit s^{-1} to 224 kbit s^{-1} are available with the default firmware [41].

The RFD900x satisfies several constraints. It reduces the time to test since it uses the ISM band, which can be used by anyone provided they follow the Low Interference Potential Devices (LIPD) Class License legislation. The use of the FHSS allows the RFD900x to transmit at the maximum power of 1 W that is allowable by the class license under the frequency hopping transmitters section [42].

Distances of 40 km line-of-sight is possible using the RFD900x [41], which is far greater than the maximum distance achievable with the rocket and drone tests. The maximum drone test scheduled had a altitude of 500 m, and the rocket was intended to fly to 10 000 ft (3 km).

This modem will not be used on the space launch, since POEM will provide a radio downlink, but it must pass environmental testing. The modem has a temperature range of $-40\text{ }^{\circ}\text{C}$ to $85\text{ }^{\circ}\text{C}$, which satisfies the range of temperatures required to pass the temperature testing [41].

Payload communications For the payload communications, a physical layer and data layer need to be specified. The physical layer determines the representation of data as (in this case) electric signals. The data layer determines how data is transmitted and received as frames.

CubeSats use the RS-485 physical layer specification and UART data layer specification to transmit data to POEM. RS-485 was chosen since it is a differential bus which increases immunity to electromagnetic interference from other elements on the launch vehicle, therefore reducing the bit error rate [43]. A combination of RS-485 and UART allows large amounts of data to be transferred since the UART data link specification is simple, especially compared to other protocols such as CAN bus [43].

Since the DAQ needs to emulate POEM services as a constraint, payload communications had to use the combination of RS-485 and UART. The Pi Zero has one hardware UART, this single-ended UART signal needs to be converted to the differential RS-485 signal using an RS-485 transceiver. The SP3485 transceiver was chosen due its low unit cost of A\$0.32 and high availability on JLCPCB. The transceiver supports data rates up to 10 Mbit s^{-1} , which is more than adequate for the 5 kbit s^{-1} downlink speed. It uses a 3.3 V logic level on the single-ended side, which is required to interface with the Pi Zero without level shifting [44]. The EN-L variant was chosen due to its extended temperature range of $-40\text{ }^{\circ}\text{C}$ to $85\text{ }^{\circ}\text{C}$ required to pass environmental testing [44].

GNSS tracking The DAQ system must be able to track the HPR throughout the full launch to enable recovery as stated in section 10.1.4 HPR test requirements. This will be achieved through a Global Navigation Satellite System (GNSS) receiver, which receives signals from GNSS satellites and determines the position and altitude of the receiver. The u-blox NEO-M9N will be used for tracking [45]. This is a multi-GNSS receiver which is able to receive from multiple GNSS constellations simultaneously, which results in a faster acquisition time and greater interference immunity [45]. The receiver can report position with an accuracy of 2.0 m (circular error probable), which is adequate for a HPR tracking application [45]. The NEO-M9N was used instead of other u-blox

receivers due to its high navigation update rate of 25 Hz which is useful due to the high speed of a HPR flight [45].

Since POEM provides the location of the CubeSat and due to the speed and altitude restriction of the NEO-M9N of 500 m s^{-1} and 80 km respectively, this receiver will not be present on the space launch and is only required for the HPR launch.

A differential GNSS (DGNSS) solution was considered and tested based on the u-blox ZED-F9P, however the drone test did not require the centimetre level precision of the ZED-F9P so it is not used in the final design.

Accelerometers Micro-electromechanical systems (MEMS) based accelerometers were chosen for the DAQ due to their low cost and low power consumption compared to traditional piezoelectric accelerometers. Two accelerometers were chosen, the ADXL375 and LSM6DSOX.

The STMicroelectronics LSM6DSOX is a MEMS inertial measurement unit (IMU) which has a $\pm 16 g$ accelerometer and $\pm 2000 \text{ m}^{\circ} \text{ s}^{-1}$ gyroscope, both with a sampling rate of 6666 kHz. This accelerometer is used to characterise the random vibration spectrum of launch due to its high sampling rate.

Due to the low full-scale of the LSM6DSOX of only $\pm 16 g$, the ADXL375 was chosen to characterise the shock response of the payload to pyroshock due to its significantly higher full-scale range of $\pm 200 g$.

System block diagram A block diagram of the system using the parts chosen is shown in figure 10.3.

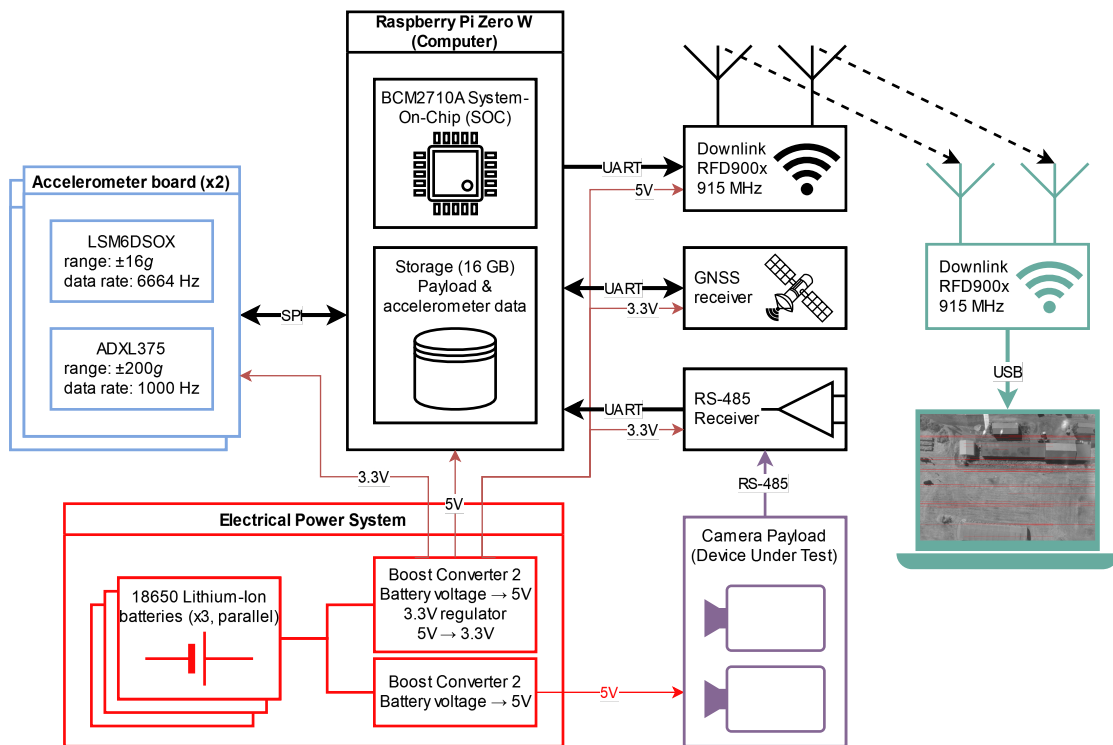


Figure 11: Block diagram of the CubeSat, including connections to the camera payload and ground station over radio downlink.

10.4 Implementation of parts into design

After the components are selected, they are integrated into the design as shown in figure 12.

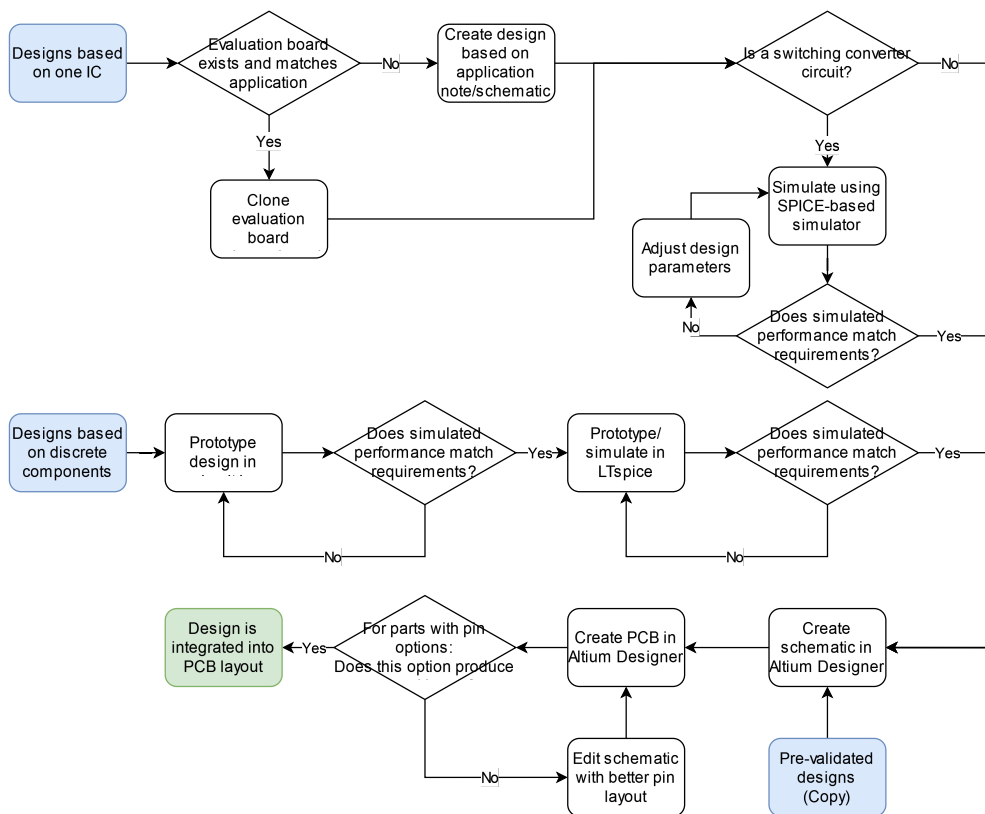


Figure 12: Workflow for integrating a design into a PCB.

Schematic-level There are three cases for integration of subsystems into the DAQ design:

1. Subsystems based around single ICs, for example power converters, are implemented by using the process outlined in the application note or by copying a reference design or evaluation board design if it exactly matches the application in the DAQ. As an additional precaution, switching converters are simulated in a SPICE simulator to ensure the output is stable over the range of input voltages and output currents.
2. Discrete components are used to implement some simple circuits to save on part cost. These are prototyped in circuit.js, then once working in circuit.js are simulated in a SPICE simulator.
3. Some subsystems have already been validated on other projects and are able to be directly applied to the DAQ system, the schematics for these designs are copied into the project.

A subsystem is implemented as a single schematic sheet in an Altium PCB project and connected to other schematics using the hierarchical sheet system. When a subsys-

tem is added, a commit for the project is created and pushed to a central version control system (VCS) server.

PCB setup Before any subsystems are laid out in the PCB, several parameters about the PCB are agreed upon.

Firstly, the physical dimensions of the PCB are negotiated with the rest of the design team to ensure it will fit. After the limits for the PCB dimensions are determined, the size of the PCB is determined according to the function of the board. It was decided to use a PCB size of 80 mm × 80 mm for the DAQ boards since this is the maximum size available for the PCB, and larger PCB areas result in higher gain for the patch antennas to be used for receiving GNSS signals. For the MEMS accelerometers, a PCB of 22 mm × 22 mm was chosen as it is the minimum size possible to fit both accelerometers and mounting holes, and minimising the PCB area maximises the resonant frequency of the accelerometers.

The stackup is then decided, which determines the number of PCB layers and the purpose of each layer. The DAQ uses a standard signal-ground-power-signal stackup since this board contains many components and therefore a dedicated power layer would be useful. The GNSS board contains few components and uses a stackup of full grounds to maximise RF performance. Four layer stackups are used since these are cheap to manufacture at JLCPCB for boards under 100 mm × 100 mm and over 50 mm × 50 mm, and four layers allows simpler routing and improved signal integrity due to being able to dedicate two planes to power and ground. The accelerometer board uses a two-layer signal-signal stackup since there are few components to route and to save cost.

Layer	DAQ	GNSS receiver	Accelerometer
Top layer	Signal	Ground	Signal
Layer 1	Ground	Ground	N/A
Layer 2	Power (3.3 V)	Ground	N/A
Bottom layer	Signal	Ground	Signal

Table 3: Stackup of each PCB

Prior to placing laying out any subsystems, PCB rules are set according to the JLCPCB capabilities page.

PCB-level Once a subsystem is finished, the components are laid out in the PCB using general PCB design rules including:

- Using the manufacturer’s sample layout and PCB layout guidelines, if they exist
- Placing the majority of components on one side to allow cheaper PCB component assembly, and placing large or manually soldered components such as connectors on the opposite side
- Minimising track distance

- Using large polygons for power routing
- Placing decoupling capacitors close to the part's VCC pins

Additional PCB rules are created where necessary, such as to enforce the geometry of RF tracks or clearance rules.

Finalisation of design and manufacturing After the PCB design is finished, an automatic design rule check (DRC) is run to find any errors that would affect manufacturing. The manufacturing outjob is run to generate artefacts such as Gerber files, the bill of materials for automated and manual manufacturing, and component locations for pick-and-place. These artefacts are sent to JLCPCB to design and partially assemble the PCBs. The manual manufacturing BOM is used to purchase components from component distributors.

After receiving the boards from JLCPCB, some basic tests are conducted (such as ensuring that voltage domains and ground are not short-circuited). After this, additional components are manually assembled either using hot-air or a soldering iron. After soldering, the manual solder joints are inspected to ensure they are not cold joints, and the boards are again tested for short-circuits.

Programming The Raspbian OS is flashed on to an SD card with settings to allow the Pi Zero to connect to a local Wi-Fi network. An external computer is used to connect to the Pi's secure shell (`ssh`) server and log into the Pi. After this, the USB Ethernet gadget is configured on the Pi and host computer sides which allows the host computer to `ssh` into Pi without needing a Wi-Fi network, which will be useful for field debugging.

A combination of Python scripts and C programs were used for different parts of the DAQ. Python is used for tasks which do not require many system calls and do not require high optimisation, such as transferring data from the payload to the radio. The advantage of Python for these tasks is speed of development. Some tasks, such as reading data from the accelerometers, require many system calls and has considerable performance impact when using Python. For these tasks, a program is written in C and compiled on the Pi Zero. C has less overhead compared to Python as it is a compiled directly to ARM assembly, whereas Python is interpreted to an intermediate representation which is executed by the Python virtual machine which adds overhead.

10.5 Preliminary testing

Several preliminary tests were conducted to test the

- Integration testing with camera system
- Ground distance testing

11 Design evaluation framework

The design evaluation framework will consist of three major types of tests:

- Environmental tests.
 - Hot and cold temperature testing.
 - Shaker table.
- Vehicle tests.
 - Drone.
 - Rocket.
- Experimental evaluation.
 - Evaluation of accelerometers.

11.1 Environmental testing

If this research continues, the DAQ will need to fly with the CubeSat on the PSLV to obtain vibration data that can be directly compared to the rocket and shaker table tests. Therefore, the DAQ will have to go through the same environmental testing campaign as the camera payload. The objective of these tests is to evaluate the resilience of the DAQ in the environment of space and during launch.

11.1.1 High-temperature test

IIST recommends a qualification test where the CubeSat placed in a thermal vacuum chamber for 2.5h and is heated to 70 °C. The CubeSat electronics are turned on and tested during the final 30 min of the test.

Due to time restrictions it was only possible to do a preliminary high-temperature test with a consumer oven on only the electronics section of the payload (the combined camera and DAQ assembly).



Figure 13: High-temperature testing setup

The DAQ was evaluated based on how much time the connection between the DAQ and ground station is lost.

11.1.2 Low-temperature test

IIST recommends a qualification test where the CubeSat is placed into a thermal vacuum chamber for 2.5 h and is cooled to -20°C . The CubeSat electronics are turned on and tested during the final 30 min of the test.

Due to time restrictions it was only possible to do a preliminary low-temperature test with a consumer freezer. To prevent condensation from developing on the electronics during the test, which would not occur in the thermal vacuum chamber, the electronics were placed in an airtight bag prior to the test and pressurised with pure nitrogen gas for 5 min to displace air containing moisture.



Figure 14: Low-temperature testing setup

The DAQ was evaluated based on how much time the connection between the DAQ and ground station is lost.

11.1.3 Shaker table test

IIST recommends that the CubeSat be mechanically qualified using a single-axis electrodynamic shaker table using random vibration, sine-sweep and half-sine shock tests.

Random vibration The IIST recommended qualification level for the random vibration test is specified in table 4.

Frequency (Hz)	PSD ($g^2 \text{ Hz}^{-1}$)	g (RMS)	Duration (s axis $^{-1}$)	Axis
20	0.002	13.5	60	Three axes
60	0.002			
250	0.138			
1000	0.138			
2000	0.034			

Table 4: IIST recommended random vibration test profile for qualification of CubeSat for launch on POEM.

This random vibration profile is standard in industry, other launches of satellites on the PSLV use similar vibration profiles.

The IIST recommended random vibration test profile was used without modifications in the final shaker table testing.

Sine-sweep The IIST recommended qualification level for the sine-sweep test is specified in table 5.

Longitudinal		Lateral		Sweep Rate	Axis
Frequency	Level	Frequency	Level		
10 Hz to 16 Hz	20 mm DA	10 Hz to 16 Hz	12 mm DA	4 oct min $^{-1}$	Three axes
16 Hz to 100 Hz	10 g	16 Hz to 100 Hz	6 g	4 oct min $^{-1}$	Three axes

Table 5: Vibration Data: Longitudinal and Lateral Details with Sweep Rate and Axis Merged

Shock The IIST recommended qualification level for the shock test is specified in table 6.

Amplitude	Duration (ms)	Shock profile	Axis
50 g	10	Half sine	Single-axis shocks, for all three axes

Table 6: IIST recommended shock test profile for qualification of CubeSat for launch on POEM.

11.1.4 Drone test flights

Drone tests were used as a qualification platform for the HPR launch since drone tests:

1. Use the expertise of the UWA Aviation Laboratory, which is participating in the project.
2. Are repeatable, whereas the rocket test can only feasibly be done once per launch season.

3. Have greater control over the position compared to the suborbital rocket launch and will better qualify the machine vision algorithms.

The drone test evaluates the communications between the camera payload and the communications downlink stability in real time. A successful test involves receiving at least one frame from the camera payload at a reasonable quality.

11.1.5 High-power rocket test flight

The high-power rocket (HPR) test flight is used as an experimental qualification method for the CubeSat. This DAQ system is used to evaluate the effectiveness of the HPR flight by using accelerometers, but the HPR flight also serves as a milestone for evaluating the effectiveness of this DAQ for this type of application.

11.2 Evaluation of accelerometers

Typical parameters for the evaluation of accelerometers include

12 First revision of test and POEM emulation electronics

The POEM provides services such as tracking, telemetry and command (TT&C), electrical power system (EPS) and on-board data handling (OBDH) to the CubeSat, therefore these systems are not integrated into the CubeSat under test and must be provided by a separate system on the HPR which emulates the POEM services. The POEM emulator consists of three PCBs: A combined EPS and OBDH board, a tracking board and a telemetry and command board. This emulation and qualification platform will be referred to as DAQ v1.

12.1 On-board data handling (OBDH)

Two OBDHs are arranged in a dual redundant configuration and are linked to each other via controller area network (CAN) bus. When the hot spare detects that the primary OBDH is outputting bad data or is not responding, the secondary OBDH will take over control of the communications link. This redundancy ensures the likelihood of not obtaining experiment data for this research is minimised. In the best case, this will provide two independent data sources for research. Both OBDHs will still store data to their respective eMMC modules for post-flight analysis.

12.2 Accelerometers

MEMS accelerometers, which will provide the data for this analysis, are located on independent modules and on the OBDH computer. The low-cost LSM6DSO accelerometer will be used due to its low cost and acceleration range of 16- g and bandwidth of up to 6664 Hz [46], which will be used to cover the quasi-static acceleration and random

vibration cases. As shown in figures 1 and 2, the g -levels and bandwidth are relatively low and are met by the LSM6DSO.

The independent accelerometer modules will contain a microcontroller, regulator and accelerometer in a small package which can be mounted at various points on the CubeSat, to measure how evenly the response is applied to the CubeSat. The microcontroller will compress the accelerometer data and send it to the OBDH over CAN bus. The OBDH will generate a clock synchronisation signal to ensure the accelerometer measurements are synchronised. The modules will be attached to the CubeSat using adhesives due to its acceptable performance at the frequencies being measured, and ease of use compared to screws.

Measuring the shock response is significantly more difficult due to the high acceleration levels and the large bandwidth [20], which are not well-suited for low-cost MEMS accelerometers. Instead of measuring the full spectrum, the slope will be measured and compared using the low-cost ADXL373 accelerometer which can measure up to 400- g at 2.56 kHz, which is enough to characterise the slope, which is the only parameter required to show that a rocket is inadequate for qualifying shock.

12.3 Electrical power system (EPS)

A 2S lithium-ion battery pack and two 5V boost converters will be used to power CubeSat and the emulator. Two independent EPS will be connected in an OR-ing configuration so that if one fails, the other will provide power. The CubeSat and emulator will have separate boost converters, and the power to the CubeSat is capable of delivering the full 5V @ 3A which is the specified amount of power available to the CubeSat on the POEM.

12.4 Telemetry and command

An RFD900x radio will be used to downlink the data from the CubeSat and the engineering sensors. This link is optimised for relatively high speed and to have the full 300 kbps capacity that the POEM can provide to the CubeSat. The experiment data required for this research will be downlinked as part of the engineering data, to ensure that data is available to continue research in case the rocket crashes and the onboard memory is destroyed.

The tracking and command system will be on a separate low-bandwidth LoRa radio which is optimised for high link budget and reliability.

12.5 GNSS Tracking

The GNSS tracking board contains a standard precision NEO-M9N GNSS receiver and the ZED-F9P differential GNSS (DGNSS) receiver. A NEO-M9N was selected against other standard GNSS receivers due to its high maximum position, velocity and time (PVT) update rate of 25 Hz. The main purpose of the NEO-M9N is to serve as a simple

backup GNSS receiver for reliable tracking purposes, since it does not require an RTK data stream.

The ZED-F9P differential receiver has centimetre-level accuracy and will enable the heading of the rocket to be accurately determined, which is required for this research since the heading may change throughout the flight and this will need to be accounted for when analysing the data since there are 6 DOF, instead of just one in traditional shaker table tests.

12.6 Drone testing

Prior to flight on a HPR the DAQ v1 was tested on a drone. TODO:

-

12.7 Results

One of the objectives of this research is to design a platform for qualification of CubeSats. The first revision of the qualification platform was not used in the final design due to several issues:

- The STM32L476 did not have enough resources to move data from the sensors and camera payload to the payload at an adequate speed. A benchmark using CrystalDiskMark, in figure 8 shows that the maximum throughput is 0.84 MB s^{-1} , and while only 60% of the throughput is being used as shown in 12.7, between reading from the data sources and writing to the storage there is not enough resources in practice to do this at an adequate speed, resulting in the maximum sampling rate of the sensors to be limited.
- Due to space limitations on the rocket, it was not possible to have two redundant systems. The next revision would use only one DAQ.
- By the end of this section, it was understood that centimetre level positioning was not required to obtain good results from the camera system.
- At the end of this revision it was concluded that the STM32 platform was not flexible enough to complete the research objectives in time.

Data source	Data rate	Notes
LSM6DSOX	0.41 MB s^{-1}	16 byte structs are generated at 6664 Hz for both acceleration and gyroscope data for two sensors.
ADXL375	0.038 MB s^{-1}	20 byte structs generated at 1 kHz for two sensors.
Camera	0.054 MB s^{-1}	460 800 bd
TOTAL	0.502 MB s^{-1}	60% of maximum sequential write bandwidth.

Table 7: Data sources and their data rates.

Test	Read [MB/s]	Write [MB/s]
SEQ1M Q1T1 (1 task, 1 thread)	0.84	0.84
RND4K Q1T1 (1 task, 1 thread)	0.75	0.66

Table 8: CrystalDiskMark benchmark of DAQ v1.

13 Second revision of test and POEM emulation electronics

The second revision of the test and POEM emulation electronics (referred to as DAQ v2) contains several improvements and simplifications over DAQ v1.

13.1 On-board data handling (OBDH)

A Pi Zero is used for the OBDH system instead of an eMMC module and STM32L476 since:

- It reduces the cost of the PCB as the assembly of BGA packages such as eMMC adds significant cost per board,
- The Pi Zero W runs an operating system and can be controlled remotely from a PC unlike the STM32, which simplifies development and debugging,
- The write speed of the Pi is larger than the STM32 and eMMC combination.

While a Raspberry Pi Zero 2W would be preferable due to its multicore design, due to supply chain issues it was only possible to use a Pi Zero.

DAQ v2 does not have two redundant OBDH due to a lack of room.

13.2 Accelerometers

13.3 Electrical power system (EPS)

DAQ v2 uses a similar EPS design to DAQ v1,

13.4 Telemetry and command

13.5 GNSS Tracking

14 High-Power Rocket

A custom rocket named UNO was designed and built by another project member from scratch, it has a height of 290 cm, diameter of 16.3 cm and a dry mass of 14.42 kg without a motor. It was designed to fly with an M impulse class motor, however due to changes in United States export regulations it was not possible to obtain this motor in the time

of this research, and therefore it was only possible to launch with a K impulse class motor which has about 1/10th of the total impulse of the N motor as shown in table 14.

Total impulse [Ns]	Motor impulse class
160.01 - 320.00	H
320.01 - 640.00	I
640.01 - 1,280.00	J
1,280.01 - 2,560.00	K
2,560.01 - 5,120.00	L
5,120.01 - 10,240.00	M
10,240.01 - 20,560.00	N
20,560.01 - 40,960.00	O
40,960.01 - 81,920.00	P
81,920.01 - 163,840.00	Q

Table 9: Rocket motor impulse classes [47]

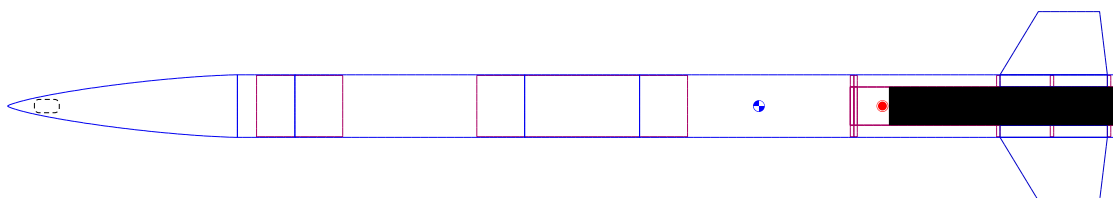


Figure 16: OpenRocket diagram of UNO.

14.1 Simulation

The rocket was simulated using OpenRocket [48], [49], an open-source simulator which can predict parameters such as stability and acceleration based on empirical methods which use the rocket's shape and basic environment parameters such as constant wind [49], [50]. OpenRocket is used to ensure the rocket design is stable throughout launch and flight, which is important to ensuring the CubeSat payload does not become damaged by this qualification method. However, as it uses a simple empirical model of the flight, it was not designed to model the effect of the motor and aerodynamic forces on the vibration environment in the rocket. It also does not simulate pyroshock events, instead modelling parachute deployment events as simple changes in the aerodynamics of the rocket [49].

14.1.1 Flight profile

As shown in 14.1.1 the rocket reaches an apogee of 413m at 9.74s and the total flight time is 30 s.

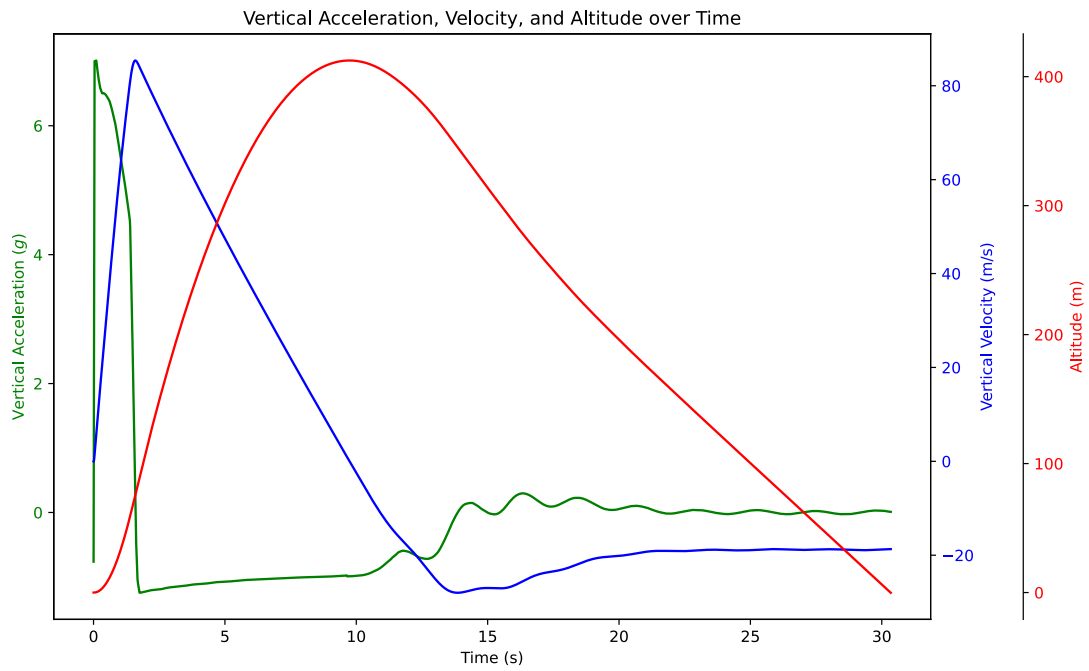


Figure 17: Flight profile of UNO using a K1100T motor. Simulated in OpenRocket.

14.1.2 Stability

As shown in figure 14.1.2, the stability is above 2.0 calibres for the coast and launch phase, which is a rule of thumb to ensure the rocket is stable and will not veer off course [23]. The short moment of stability below 2.0 occurs when the rocket reaches apogee, which is not an issue since the parachutes are immediately deployed at this point.

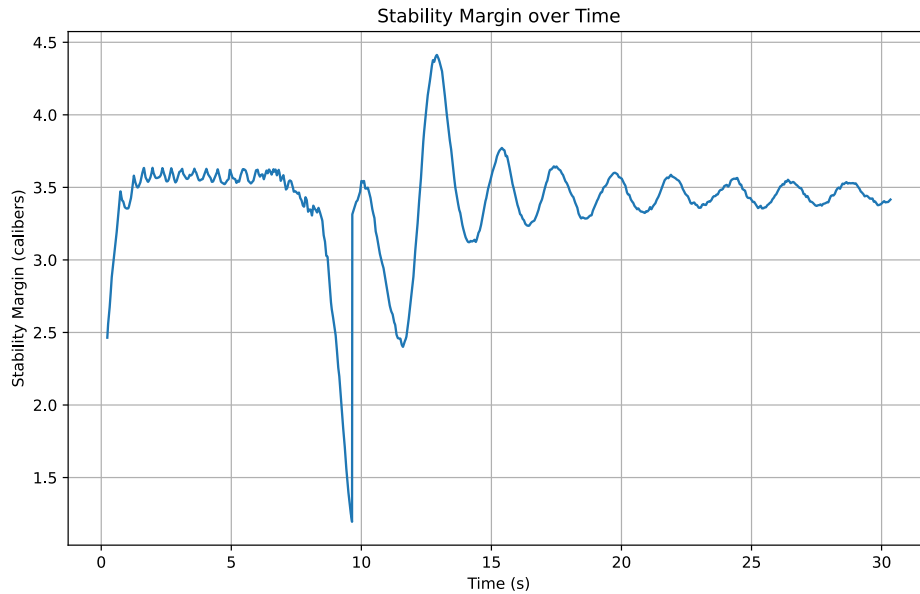


Figure 18: Stability of UNO using a K1100T motor. Simulated in OpenRocket.

14.1.3 Acceleration

As stated, since OpenRocket does not model the vibration environment in the rocket and models the rocket as one solid body, only the acceleration of the whole rocket can be modelled. Pyroshock events are not modelled by OpenRocket. The launch phase lasts only 1.6s and has a high average acceleration of $5.77g$, as shown in 14.1.3. During the coast phase, the rocket is decelerated by gravity as expected and after parachute deployment the rocket only has a small deceleration force.

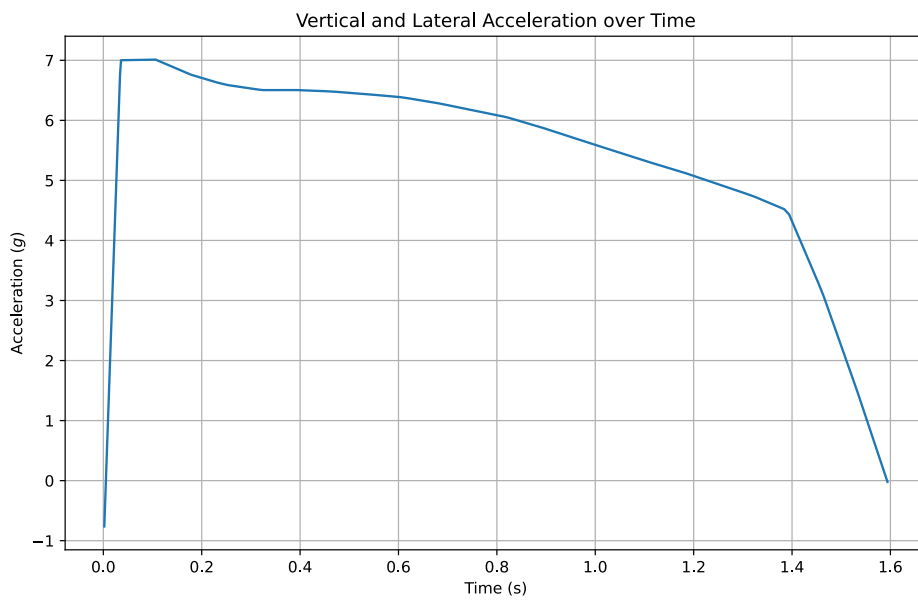
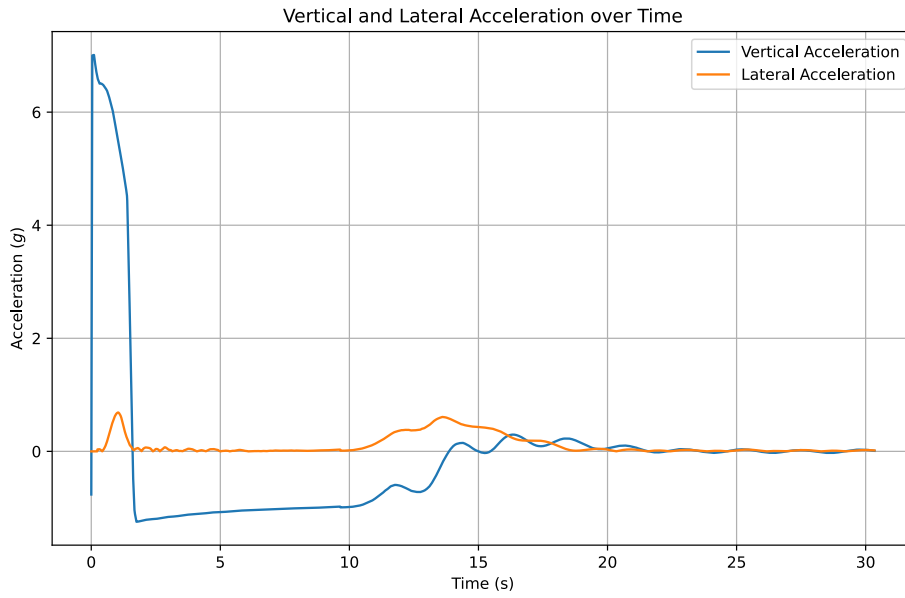


Figure 19: Acceleration of UNO using a K1100T motor over (top) the whole flight and (bottom) the thrust phase. Simulated in OpenRocket.

15 Vibration table testing

15.1 AVI vibration table test setup

16 Rocket test

17 Drone tests

17.1 First test

17.2 Second test

18 Data collection and analysis

The system will be used for the vibration tests on a shaker table, and the rocket test. The data will be recorded as a time series on the OBDH memory. The time series data will be transformed into the frequency domain since existing studies have presented frequency domain plots to present and analyse the response of the system to a test [13], [20]. For the rocket test, the analysis will be split over the several phases of flight - launch, thrust, coast and parachute deployment events, since the forces involved are different in all of these phases.

18.1 Shock

18.1.1 Vibration table results

18.1.2 HPR results

18.1.3 Comparison of methods

In the launch and parachute deployments, where pyrotechnics are ignited, an analysis of the shock response spectrum will be performed. This will involve creating the shock response spectrum for the rocket test and shaker table tests, then comparing the slope up to 1 kHz. If the rocket test SRS slope is on the same order of magnitude as the gradient found in [24] for other low explosives, and it is less than the slope of the SRS from the shaker table tests, then this will show that rocket testing is not an adequate qualification method for shock.

18.2 Random

18.2.1 Vibration table results

18.2.2 HPR results

18.2.3 Comparison of methods

The coast phase, where the rocket motor has burnt out but is still approaching apogee, will be compared to the random vibration test. The random response spectrum will

be compared to the spectrum of the rocket test to check how uniformly distributed the rocket test is.

18.3 Quasi-static acceleration

18.3.1 Vibration table results

18.3.2 HPR results

18.3.3 Comparison of methods

The boost phase will be compared to the quasi-static acceleration tests on the shaker table. It is expected that the acceleration force on the HPR will be greater than those experienced on the launch vehicle, however the key characteristic - a peak in acceleration over a narrow frequency band - should be the same.

19 Conclusion

19.1 Future work

Hardware changes for a future revision of the data acquisition system include:

- Use Raspberry Pi Zero 2W instead of Zero W since it has more cores.
- Machine a heatsink to connect all chips on the Pi Zero module to the chassis or heatsink to ensure better thermal performance [39].

20 References

- [1] R. P. Welle, “Overview of cubesat technology,” *Handbook of Small Satellites: Technology, Design, Manufacture, Applications, Economics and Regulation*, pp. 1–17, 2020.
- [2] J. Bouwmeester, A. Menicucci, and E. K. Gill, “Improving cubesat reliability: Subsystem redundancy or improved testing?” *Reliability Engineering & System Safety*, vol. 220, p. 108 288, 2022.
- [3] S. Gordon and D. L. Kern, “Benefits of spacecraft level vibration testing,” in *Aerospace Testing Seminar*, 2015.
- [4] L. K. Slongo, J. G. Reis, D. Gaiki, P. V. H. Seger, S. V. Martínez, B. V. B. Eiterer, T. G. Pereira, M. B. Neto, M. dos Santos Frata, H. D. Hamisch, *et al.*, “Pre-flight qualification test procedure for nanosatellites using sounding rockets,” *Acta Astronautica*, vol. 159, pp. 564–577, 2019.
- [5] T. Ludovico, “Targeting low earth orbit vegetation indexing for home grown sensing,” Master’s thesis, The University of Western Australia, 2024.

- [6] N. Nath and G. S. Aglietti, "Study the effect of tri-axis vibration testing over single-axis vibration testing on a satellite," in *2022 IEEE Aerospace Conference (AERO)*, IEEE, 2022, pp. 1–10.
- [7] D. T. Pierce, "Development of a rocket test platform capable of delivering standard dimension payloads to near-space altitudes," Ph.D. dissertation, Monterey, CA; Naval Postgraduate School, 2019.
- [8] M. G. Mariano, F. E. Morsch, M. S. Vega, D. M. A. M. Pio, S. L. Oriel, S. L. Kessler, and B. E. Augusto, "Qualification and validation test methodology of the open-source cubesat floripasat-i," *Journal of Systems Engineering and Electronics*, vol. 31, no. 6, pp. 1230–1244, 2020. DOI: 10.23919/JSEE.2020.000103.
- [9] G. Minelli, L. Magallanes, N. Weitz, D. Rigmaiden, J. Horning, J. Newman, M. Scott, S. Brady, C. Watkins, J. Christensen, *et al.*, "The mobile cubesat command and control (mc3) ground station network: An overview and look ahead," 2019.
- [10] NASA Goddard Space Flight Center, *General Environmental Verification Standard (GEVS) for GSFC Flight Programs and Projects*, NASA Technical Standard, Document date: April 28, 2021., NASA Goddard Space Flight Center, 2021. [Online]. Available: {<https://standards.nasa.gov/standard/GSFC/GSFC-STD-7000>}.
- [11] M. Cho, H. Masui, T. Hatamura, S. Horii, S. Obata, *et al.*, "Overview of nano-satellite environmental tests standardization project: Test campaign and standard draft," 2012.
- [12] C. D. Brown 1930, *Elements of spacecraft design*, English, ser. AIAA education series. Reston, VA: American Institute of Aeronautics and Astronautics, 2002, ISBN: 978-1-60086-051-5 1-60086-051-6 978-1-60086-179-6 1-60086-179-2. [Online]. Available: <https://doi.org/10.2514/4.861796>.
- [13] C. Nieto-Peroy and M. R. Emami, "Cubesat mission: From design to operation," *Applied Sciences*, vol. 9, no. 15, p. 3110, 2019.
- [14] G. S. Aglietti, M. Remedias, M. Appolloni, and A. Kiley, "Spacecraft structure model validation and test philosophy," *AIAA Journal*, vol. 57, no. 5, pp. 2109–2122, 2019.
- [15] W. Rawson and E. G. Lightsey, "Best practices and considerations for planning and conducting integration of university cubesats,"
- [16] Z. S. Decker, "A systems-engineering assessment of multiple cubesat build approaches," Ph.D. dissertation, Massachusetts Institute of Technology, 2016.
- [17] J. Dickens, M. Wittbrodt, M. Gate, L. Li, and A. Stroeve, "Coupled loads analysis accuracy from the space vehicle perspective," *Acta Astronautica*, vol. 48, no. 1, pp. 21–28, 2001.
- [18] D. Casalino, S. Santini, M. Genito, and V. Ferrara, "Rocket noise sources localization through a tailored beam-forming technique," *AIAA journal*, vol. 50, no. 10, pp. 2146–2158, 2012.

- [19] L. J. Bement and M. L. Schimmel, “A manual for pyrotechnic design, development and qualification,” Tech. Rep., 1995.
- [20] National Aeronautics and Space Administration, *Pyroshock test criteria*, NASA Technical Standard, National Aeronautics and Space Administration, 2011. [Online]. Available: <https://s3vi.ndc.nasa.gov/ssri-kb/static/resources/NASA-STD-7003A.pdf>.
- [21] G. Seibert and B. T. Battrick, *The history of sounding rockets and their contribution to European space research*. ESA Publications division Noordwijk, 2006.
- [22] B. Pont, J. Beurskens, J Dalderup, P. Dolron, J Gubbels, J Horandel, R. Jordans, H. Pourshaghghi, D Szálas-Motesiczky, T. v. Vliet, *et al.*, “Rexus-25 rocket flight of a cubesat cosmic-ray detector,” 2019.
- [23] M. Canepa, *Modern high-power rocketry*. Trafford Publishing, 2005, vol. 2.
- [24] J. Wang, X. Ren, X. Li, Y. Wen, L Cheng, and Q Guo, “Numerical simulation of the effect of combustion characteristics of main charges on the output shock of a typical igniter,” in *Journal of Physics: Conference Series*, IOP Publishing, vol. 2478, 2023, p. 072024.
- [25] N. Meirambekuly, B. A. Karibayev, T. A. Namazbayev, G.-G. A. E. Ibrayev, S. O. Orynassar, S. A. Ivanovich, and A. A. Temirbayev, “A high gain deployable l/s band conical helix antenna integrated with optical system for earth observation cubesats,” *IEEE Access*, vol. 11, pp. 23 097–23 106, 2023. DOI: 10.1109/ACCESS.2023.3253556.
- [26] P Falstad, “Falstad circuit simulator,” <https://falstad.com/circuit/circuitjs.html> (accessed Oct. 14 2024),
- [27] M. Giesselmann and V. Roy, “Modeling of power supplies for power modulators with ltspice,” *IEEE Transactions on Dielectrics and Electrical Insulation*, vol. 26, no. 2, pp. 508–514, 2019.
- [28] Analog Devices, *Ltspice help*, <https://ltwiki.org/files/LTspiceHelp.chm/html/SPICE.htm> (accessed Oct. 8, 2024), 2022.
- [29] K Jagdale, M Munjal, P Kurrey, A Wakode, P Lohiya, P Shrivastava, A Sikka, S Bhansali, A Kejriwal, A Vadladi, *et al.*, “Sanket—technology demonstration of antenna deployment system on pslv stage 4 orbital platform,” in *Advances in Small Satellite Technologies: Proceedings of National Conference on Small Satellite Technology and Applications, NCSSTA 2020*, Springer, 2023, pp. 87–95.
- [30] Australian Youth Aerospace Association, *2024 aurc rocket specifications*, version Draft A, <https://aurc.ayaa.com.au/wp-content/uploads/2023/12/2024-AURC-Rocket-Specifications-Draft-A.pdf> (accessed Oct. 15, 2024), 2023.
- [31] V. Knap, L. K. Vestergaard, and D.-I. Stroe, “A review of battery technology in cubesats and small satellite solutions,” *Energies*, vol. 13, no. 16, p. 4097, 2020.

- [32] A. D. Pathak, S. Saha, V. K. Bharti, M. M. Gaikwad, and C. S. Sharma, “A review on battery technology for space application,” *Journal of Energy Storage*, vol. 61, p. 106 792, 2023.
- [33] F. Krause, J.-P. Ruiz, S. Jones, E. Brandon, E. Darcy, C. Iannello, and R. Bugga, “Performance of commercial li-ion cells for future nasa missions and aerospace applications,” *Journal of The Electrochemical Society*, vol. 168, no. 4, p. 040 504, 2021.
- [34] G. M. Marcelino, E. Morsch Filho, S. V. Martinez, L. O. Seman, and E. A. Bezerra, “In-orbit preliminary results from the open-source educational nanosatellite floripasat-i,” *Acta Astronautica*, vol. 188, pp. 64–80, 2021.
- [35] Samsung SDI Co., Ltd., “Specification of product: Lithium-ion rechargeable cell for power tools (model: Inr18650-25r),” Tech. Rep., version 1.0, 2014.
- [36] Texas Instruments, *Tps61022 8-a boost converter with 0.5-v ultra-low input voltage*, D, <https://www.ti.com/lit/ds/symlink/tps61022.pdf> (accessed Oct. 15, 2024), 2021.
- [37] Advanced Monolithic Systems, Inc., *Ams1117 1a low dropout voltage regulator*, <http://www.advanced-monolithic.com/pdf/ds1117.pdf> (accessed Oct. 15, 2024), 2007.
- [38] E. Upton and G. Halfacree, *Raspberry Pi user guide*. John Wiley & Sons, 2016.
- [39] S. M. Guertin, “Raspberry pis for space guideline,” *NASA: Washington, DC, USA*, 2022.
- [40] MaxLinear, *Xr20m1172 two channel i2c/spi uart with 64-byte fifo*, <https://www.maxlinear.com/ds/xr20m1172.pdf> (accessed Oct. 15, 2024), 2022.
- [41] RF Design, *Rfd900x and rfd868x radio modem datasheet*, <https://files.rfdesign.com.au/Files/documents/RFD900x%20DataSheet%20V1.2.pdf> (accessed Oct. 15, 2024), 2020.
- [42] Department of Infrastructure, Transport, Regional Development, Communications and the Arts, *Radiocommunications (low interference potential devices) class licence 2015*, <https://www.legislation.gov.au/F2015L01438/latest/text> (accessed Oct. 15, 2024), 2015.
- [43] A. Cratere, L. Gagliardi, G. A. Sanca, F. Golmar, and F. Dell’Olio, “On-board computer for cubesats: State-of-the-art and future trends,” *IEEE Access*, 2024.
- [44] MaxLinear, *Sp3485 data sheet*, <https://www.maxlinear.com/ds/sp3485.pdf> (accessed Oct. 15, 2024), 2021.
- [45] u-blox, *Neo-m9n-00b - data sheet*, https://content.u-blox.com/sites/default/files/NEO-M9N-00B_DataSheet_UBX-19014285.pdf (accessed Oct. 15, 2024), 2023.

- [46] STMicroelectronics, *LSM6DSO: iNEMO inertial module: always-on 3D accelerometer and 3D gyroscope*, DS12140 - Rev 2 - January 2019, STMicroelectronics, 2019. [Online]. Available: {<https://www.st.com/resource/en/datasheet/lsm6dso.pdf>}.
- [47] National Fire Protection Association, *NFPA 1127 Code for High Power Rocketry*, 2018 edition. NFPA, 2018.
- [48] Sampo Niskanen and others, *Openrocket simulator*, <https://openrocket.info/index.html> (accessed Oct. 10, 2024), 2024.
- [49] S. Niskanen, “Development of an open source model rocket simulation software,” Master’s thesis, Aalto University, Espoo, 2009. [Online]. Available: https://github.com/openrocket/openrocket/releases/download/Development_of_an_Open_Source_model_rocket_simulation-thesis-v20090520/Development_of_an_Open_Source_model_rocket_simulation-thesis-v20090520.pdf.
- [50] W. Brown, M. Wiesneth, T. Faust, N. Huynh, C. Montalvo, K. Lino, and A. Tindell, “Measured and simulated analysis of a model rocket,” *Proceedings of the Institution of Mechanical Engineers, Part G: Journal of Aerospace Engineering*, vol. 233, no. 4, pp. 1397–1411, 2019. DOI: 10.1177/0954410017752730. eprint: <https://doi.org/10.1177/0954410017752730>. [Online]. Available: <https://doi.org/10.1177/0954410017752730>.

21 Appendix

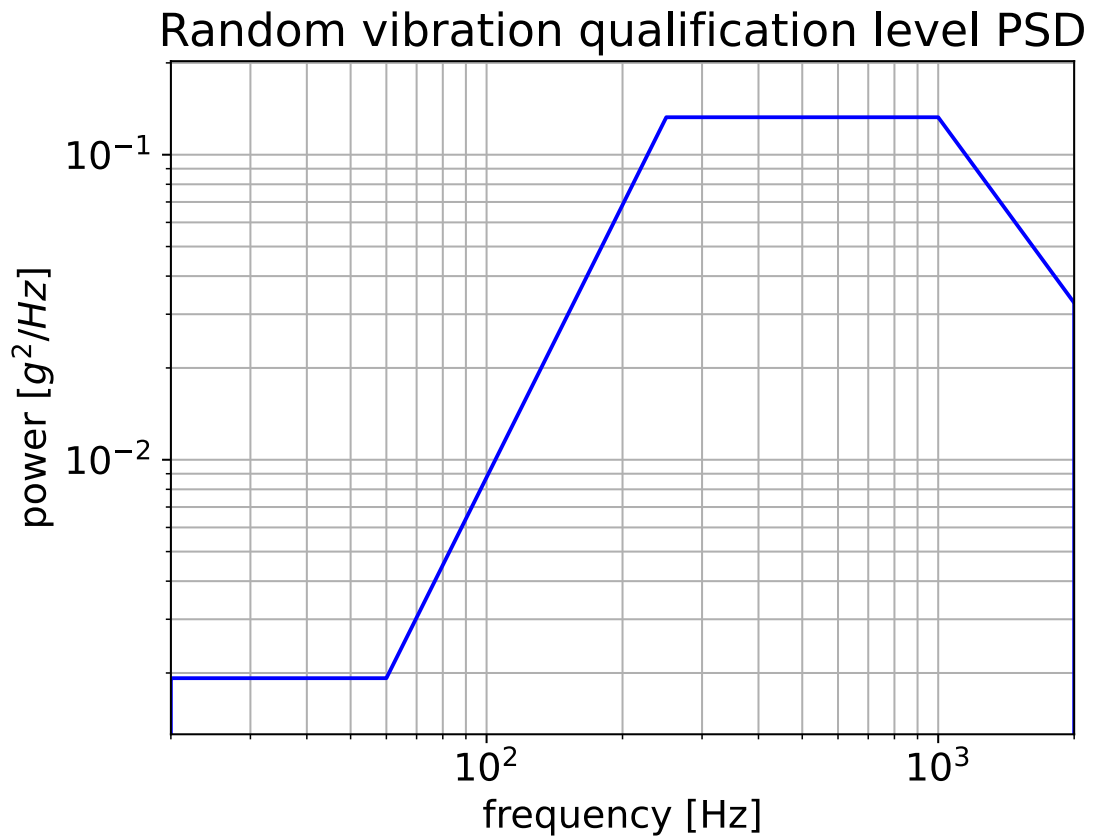


Figure 15: IIST recommended random vibration test profile for qualification of CubeSat for launch on POEM (profile defined in 4).