

Idiot's guide to ELEC4402 communication systems

This unit allows you to bring infinite physical notes (except books borrowed from the UWA library) to all tests and the final exam. You can't rely on what material they provide in the test/exam, it is very *minimal* to say the least. Hope this helps.

If you have issues or suggestions, [raise them on GitHub](#). I accept [pull requests](#) for fixes or suggestions but the content must not be copyrighted under a non-GPL compatible license.

Download PDF

It is recommended to refer to use [the PDF copy](#) instead of whatever GitHub renders.

License and information

Notes are open-source and licensed under the GNU GPL-3.0. **You must include the full-text of the license and follow its terms when using these notes or any diagrams in derivative works** (but not when printing as notes)

Copyright (C) 2024 Peter Tanner

► [GPL copyright information](#)

Other advice for this unit

Get more exam papers on OneSearch

- You can access up to **6** more papers with this method (You normally only get the previous year's paper on LMS in week 12).
 - Either [search "Communications"](#) and filter by type "[Examination Papers](#)"
 - Or search old unit codes
 - ELEC4301 Digital Communications and Networking
 - ENGT4301 Digital Communications and Networking
 - ELEC3302 Communications Systems
 - Note that ELEC5501 Advanced Communications is a different unit.
- [Listing of examination papers on OneSearch](#)

Tests

- A lot of the unit requires you to learn processes and apply them. This is quite time consuming to do during the semester and the marking of the tests will destroy your wam if you do not know the process (especially compared to signal processing and signals and systems), I do not recommend doing this unit during thesis year.
- This formula sheet will attempt to condense all processes/formulas you may need in this unit.
- **You do not get given a formula sheet**, so you are entirely dependent on your own notes (except for some exceptions, such as the $\operatorname{erf}(x)$ table). So bring good notes.
- Doing this unit after signal processing is a good idea.

Printable notes begins on next page (in PDF)

Fourier transform identities

Time domain $x(t)$	Frequency domain $X(f)$
$\text{rect}\left(\frac{t}{T}\right) \quad \Pi\left(\frac{t}{T}\right)$	$T \text{sinc}(fT)$
$\text{sinc}(2Wt)$	$\frac{1}{2W} \text{rect}\left(\frac{f}{2W}\right) \quad \frac{1}{2W} \Pi\left(\frac{f}{2W}\right)$
$\exp(-at)u(t), \quad a > 0$	$\frac{1}{a + j2\pi f}$
$\exp(-a t), \quad a > 0$	$\frac{2a}{a^2 + (2\pi f)^2}$
$\exp(-\pi t^2)$	$\exp(-\pi f^2)$
$1 - \frac{ t }{T}, \quad t < T$	$T \text{sinc}^2(fT)$
$\delta(t)$	1
1	$\delta(f)$
$\delta(t - t_0)$	$\exp(-j2\pi f t_0)$
$\exp(j2\pi f_c t)$	$\delta(f - f_c)$
$\cos(2\pi f_c t)$	$\frac{1}{2}[\delta(f - f_c) + \delta(f + f_c)]$
$\sin(2\pi f_c t)$	$\frac{1}{2j}[\delta(f - f_c) - \delta(f + f_c)]$
$\text{sgn}(t)$	$\frac{1}{j\pi f}$
$\frac{1}{\pi t}$	$-j \text{sgn}(f)$
$u(t)$	$\frac{1}{2}\delta(f) + \frac{1}{j2\pi f}$
$\sum_{n=-\infty}^{\infty} \delta(t - nT_0)$	$\frac{1}{T_0} \sum_{n=-\infty}^{\infty} \delta\left(f - \frac{n}{T_0}\right) = f_0 \sum_{n=-\infty}^{\infty} \delta(f - n f_0)$

Time domain $x(t)$	Frequency domain $X(f)$	Property
$g(t - a)$	$\exp(-j2\pi f a)G(f)$	Time shifting
$\exp(-j2\pi f_c t)g(t)$	$G(f - f_c)$	Frequency shifting
$g(bt)$	$\frac{G(f/b)}{ b }$	Time scaling
$g(bt - a)$	$\frac{1}{ b } \exp(-j2\pi a(f/b)) \cdot G(f/b)$	Time scaling and shifting
$\frac{d}{dt}g(t)$	$j2\pi f G(f)$	Differentiation wrt time
$g^*(t)$	$G^*(-f)$	Conjugate functions
$G(t)$	$g(-f)$	Duality
$\int_{-\infty}^t g(\tau) d\tau$	$\frac{1}{j2\pi f} G(f) + \frac{G(0)}{2} \delta(f)$	Integration wrt time
$g(t)h(t)$	$G(f) * H(f)$	Time multiplication
$g(t) * h(t)$	$G(f)H(f)$	Time convolution
$ag(t) + bh(t)$	$aG(f) + bH(f)$	Linearity a, b constants

Description	Property
$g(0) = \int_{-\infty}^{\infty} G(f) df$	Area under $G(f)$
$G(0) = \int_{-\infty}^{\infty} g(t) dt$	Area under $g(t)$

$$u(t) = \begin{cases} 1, & t > 0 \\ \frac{1}{2}, & t = 0 \\ 0, & t < 0 \end{cases} \quad \text{Unit Step Function}$$

$$\text{sgn}(t) = \begin{cases} +1, & t > 0 \\ 0, & t = 0 \\ -1, & t < 0 \end{cases} \quad \text{Signum Function}$$

$$\text{sinc}(2Wt) = \frac{\sin(2\pi Wt)}{2\pi Wt} \quad \text{sinc Function}$$

$$\text{rect}(t) = \Pi(t) = \begin{cases} 1, & -0.5 < t < 0.5 \\ 0, & |t| > 0.5 \end{cases} \quad \text{Rectangular/Gate Function}$$

$$g(t) * h(t) = (g * h)(t) = \int_{-\infty}^{\infty} g(\tau)h(t - \tau)d\tau \quad \text{Convolution}$$

Fourier transform of continuous time periodic signal

Required for some questions on **sampling**:


Transform a continuous time-periodic signal $x_p(t) = \sum_{n=-\infty}^{\infty} x(t - nT_s)$ with period T_s :

$$X_p(f) = \sum_{n=-\infty}^{\infty} C_n \delta(f - nf_s) \quad f_s = \frac{1}{T_s}$$

Calculate C_n coefficient as follows from $x_p(t)$:

$$\begin{aligned} C_n &= \frac{1}{T_s} \int_{T_s} x_p(t) \exp(-j2\pi f_s t) dt \\ &= \frac{1}{T_s} X(nf_s) \quad (\text{TODO: Check}) \quad x(t - nT_s) \text{ is contained in the interval } T_s \end{aligned}$$

rect function

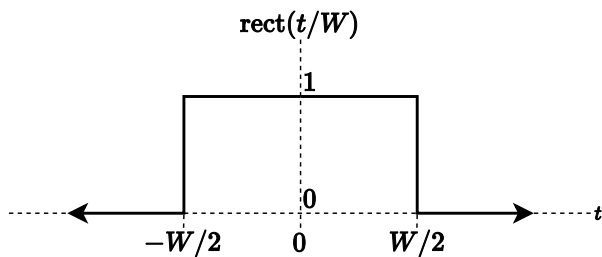

Bessel function

$$\begin{aligned} \sum_{n \in \mathbb{Z}} J_n^2(\beta) &= 1 \\ J_n(\beta) &= (-1)^n J_{-n}(\beta) \end{aligned}$$

White noise

$$\begin{aligned} R_W(\tau) &= \frac{N_0}{2} \delta(\tau) = \frac{kT}{2} \delta(\tau) = \sigma^2 \delta(\tau) \\ G_w(f) &= \frac{N_0}{2} \\ N_0 &= kT \\ G_y(f) &= |H(f)|^2 G_w(f) \\ G_y(f) &= G(f) G_w(f) \end{aligned}$$

WSS

$$\begin{aligned} \mu_X(t) &= \mu_X \text{ Constant} \\ R_{XX}(t_1, t_2) &= R_X(t_1 - t_2) = R_X(\tau) \\ E[X(t_1)X(t_2)] &= E[X(t)X(t + \tau)] \end{aligned}$$

Ergodicity

$$\begin{aligned}\langle X(t) \rangle_T &= \frac{1}{2T} \int_{-T}^T x(t) dt \\ \langle X(t+\tau)X(t) \rangle_T &= \frac{1}{2T} \int_{-T}^T x(t+\tau)x(t) dt \\ E[\langle X(t) \rangle_T] &= \frac{1}{2T} \int_{-T}^T x(t) dt = \frac{1}{2T} \int_{-T}^T m_X dt = m_X\end{aligned}$$

Type	Normal	Mean square sense
ergodic in mean	$\lim_{T \rightarrow \infty} \langle X(t) \rangle_T = m_X(t) = m_X$	$\lim_{T \rightarrow \infty} \text{VAR}[\langle X(t) \rangle_T] = 0$
ergodic in autocorrelation function	$\lim_{T \rightarrow \infty} \langle X(t+\tau)X(t) \rangle_T = R_X(\tau)$	$\lim_{T \rightarrow \infty} \text{VAR}[\langle X(t+\tau)X(t) \rangle_T] = 0$

Note: **A WSS random process needs to be both ergodic in mean and autocorrelation to be considered an ergodic process**

Other identities

$$f * (g * h) = (f * g) * h \quad \text{Convolution associative}$$

$$a(f * g) = (af) * g \quad \text{Convolution associative}$$

$$\sum_{x=-\infty}^{\infty} (f(xa)\delta(\omega - xb)) = f\left(\frac{\omega a}{b}\right)$$

Other trig

$$\cos 2\theta = 2 \cos^2 \theta - 1 \Leftrightarrow \frac{\cos 2\theta + 1}{2} = \cos^2 \theta$$

$$e^{-j\alpha} - e^{j\alpha} = -2j \sin(\alpha)$$

$$e^{-j\alpha} + e^{j\alpha} = 2 \cos(\alpha)$$

$$\cos(-A) = \cos(A)$$

$$\sin(-A) = -\sin(A)$$

$$\sin(A + \pi/2) = \cos(A)$$

$$\sin(A - \pi/2) = -\cos(A)$$

$$\cos(A - \pi/2) = \sin(A)$$

$$\cos(A + \pi/2) = -\sin(A)$$

$$\int_{x \in \mathbb{R}} \text{sinc}(Ax) = \frac{1}{|A|}$$

$$\cos(A + B) = \cos(A) \cos(B) - \sin(A) \sin(B)$$

$$\sin(A + B) = \sin(A) \cos(B) + \cos(A) \sin(B)$$

$$\cos(A) \cos(B) = \frac{1}{2}(\cos(A - B) + \cos(A + B))$$

$$\cos(A) \sin(B) = \frac{1}{2}(\sin(A + B) - \sin(A - B))$$

$$\sin(A) \sin(B) = \frac{1}{2}(\cos(A - B) - \cos(A + B))$$

$$\cos(A) + \cos(B) = 2 \cos\left(\frac{A - B}{2}\right) \cos\left(\frac{A + B}{2}\right)$$

$$\cos(A) - \cos(B) = -2 \sin\left(\frac{A - B}{2}\right) \sin\left(\frac{A + B}{2}\right)$$

$$\sin(A) + \sin(B) = 2 \sin\left(\frac{A + B}{2}\right) \cos\left(\frac{A - B}{2}\right)$$

$$\sin(A) - \sin(B) = 2 \sin\left(\frac{A - B}{2}\right) \cos\left(\frac{A + B}{2}\right)$$

$$\cos(A) + \sin(B) = -2 \sin\left(\frac{A - B}{2} - \frac{\pi}{4}\right) \sin\left(\frac{A + B}{2} + \frac{\pi}{4}\right)$$

$$\cos(A) - \sin(B) = -2 \sin\left(\frac{A + B}{2} - \frac{\pi}{4}\right) \sin\left(\frac{A - B}{2} + \frac{\pi}{4}\right)$$

IQ/Complex envelope

Def. $\tilde{g}(t) = g_I(t) + jg_Q(t)$ as the complex envelope. Best to convert to $e^{j\theta}$ form.

Convert complex envelope representation to time-domain representation of signal

$$\begin{aligned}g(t) &= g_I(t) \cos(2\pi f_c t) - g_Q(t) \sin(2\pi f_c t) \\ &= \operatorname{Re}[\tilde{g}(t) \exp(j2\pi f_c t)] \\ &= A(t) \cos(2\pi f_c t + \phi(t)) \\ A(t) &= |g(t)| = \sqrt{g_I^2(t) + g_Q^2(t)} \quad \text{Amplitude} \\ \phi(t) & \quad \text{Phase} \\ g_I(t) &= A(t) \cos(\phi(t)) \quad \text{In-phase component} \\ g_Q(t) &= A(t) \sin(\phi(t)) \quad \text{Quadrature-phase component}\end{aligned}$$

For transfer function

$$\begin{aligned}h(t) &= h_I(t) \cos(2\pi f_c t) - h_Q(t) \sin(2\pi f_c t) \\ &= 2\operatorname{Re}[\tilde{h}(t) \exp(j2\pi f_c t)] \\ \Rightarrow \tilde{h}(t) &= h_I(t)/2 + jh_Q(t)/2 = A(t)/2 \exp(j\phi(t))\end{aligned}$$

AM

CAM

$$\begin{aligned}m_a &= \frac{\min_t |k_a m(t)|}{A_c} \quad k_a \text{ is the amplitude sensitivity (volt}^{-1}\text{), } m_a \text{ is the modulation index.} \\ m_a &= \frac{A_{\max} - A_{\min}}{A_{\max} + A_{\min}} \quad (\text{Symmetrical } m(t)) \\ m_a &= k_a A_m \quad (\text{Symmetrical } m(t)) \\ x(t) &= A_c \cos(2\pi f_c t) [1 + k_a m(t)] = A_c \cos(2\pi f_c t) [1 + m_a m(t)/A_c], \\ & \quad \text{where } m(t) = A_m \hat{m}(t) \text{ and } \hat{m}(t) \text{ is the normalized modulating signal} \\ P_c &= \frac{A_c^2}{2} \quad \text{Carrier power} \\ P_x &= \frac{1}{4} m_a^2 A_c^2 \\ \eta &= \frac{\text{Signal Power}}{\text{Total Power}} = \frac{P_x}{P_x + P_c} \\ B_T &= 2f_m = 2B\end{aligned}$$

B_T : Signal bandwidth B : Bandwidth of modulating wave

Overmodulation (resulting in phase reversals at crossing points): $m_a > 1$

DSB-SC

$$\begin{aligned}x_{\text{DSB}}(t) &= A_c \cos(2\pi f_c t) m(t) \\ B_T &= 2f_m = 2B\end{aligned}$$

FM/PM

$$\begin{aligned}s(t) &= A_c \cos[2\pi f_c t + k_p m(t)] \quad \text{Phase modulated (PM)} \\ s(t) &= A_c \cos\left[2\pi f_c t + 2\pi k_f \int_0^t m(\tau) d\tau\right] \quad \text{Frequency modulated (FM)} \\ s(t) &= A_c \cos[2\pi f_c t + \beta \sin(2\pi f_m t)] \quad \text{FM single tone} \\ \beta &= \frac{\Delta f}{f_m} = k_f A_m \quad \text{Modulation index} \\ \Delta f &= \beta f_m = k_f A_m f_m = \max_t(k_f m(t)) - \min_t(k_f m(t)) \quad \text{Maximum frequency deviation} \\ D &= \frac{\Delta f}{W_m} \quad \text{Deviation ratio, where } W_m \text{ is bandwidth of } m(t) \text{ (Use FT)}\end{aligned}$$

Bessel form and magnitude spectrum (single tone)

$$s(t) = A_c \cos[2\pi f_c t + \beta \sin(2\pi f_m t)] \Leftrightarrow s(t) = A_c \sum_{n=-\infty}^{\infty} J_n(\beta) \cos[2\pi(f_c + n f_m)t]$$

FM signal power

$$P_{av} = \frac{A_c^2}{2}$$

$$P_{band_index} = \frac{A_c^2 J_{band_index}^2(\beta)}{2}$$

$$band_index = 0 \implies f_c + 0f_m$$

$$band_index = 1 \implies f_c + 1f_m, \dots$$

Carson's rule to find B (98% power bandwidth rule)

$$B = 2Mf_m = 2(\beta + 1)f_m$$

$$= 2(\Delta f + f_m)$$

$$= 2(k_f A_m + f_m)$$

$$= 2(D + 1)W_m$$

$$B = \begin{cases} 2(\Delta f + f_m) & \text{FM, sinusoidal message} \\ 2(\Delta\phi + 1)f_m & \text{PM, sinusoidal message} \end{cases}$$

Δf of arbitrary modulating signal

Find instantaneous frequency f_{FM} .

M : Number of **pairs** of significant sidebands

$$s(t) = A_c \cos(\theta_{FM}(t))$$

$$f_{FM}(t) = \frac{1}{2\pi} \frac{d\theta_{FM}(t)}{dt}$$

$$A_m = \max_t |m(t)|$$

$$\Delta f = \max_t (f_{FM}(t)) - f_c$$

$$W_m = \max(\text{frequencies in } \theta_{FM}(t) \dots)$$

Example: $\text{sinc}(At + t) + 2 \cos(2\pi t) = \frac{\sin(2\pi((At + t)/2))}{\pi(At + t)} + 2 \cos(2\pi t) \rightarrow W_m = \max\left(\frac{A+1}{2}, 1\right)$

$$D = \frac{\Delta f}{W_m}$$

$$B_T = 2(D + 1)W_m$$

Complex envelope

$$s(t) = A_c \cos(2\pi f_c t + \beta \sin(2\pi f_m t)) \Leftrightarrow \tilde{s}(t) = A_c \exp(j\beta \sin(2\pi f_m t))$$

$$s(t) = \text{Re}[\tilde{s}(t) \exp(j2\pi f_c t)]$$

$$\tilde{s}(t) = A_c \sum_{n=-\infty}^{\infty} J_n(\beta) \exp(j2\pi f_m t)$$

Band

Narrowband	Wideband
------------	----------

$$D < 1, \beta < 1 \quad D > 1, \beta > 1$$

Power, energy and autocorrelation

$$G_{\text{WGN}}(f) = \frac{N_0}{2}$$

$$G_x(f) = |H(f)|^2 G_w(f) \text{ (PSD)}$$

$$G_x(f) = G(f)G_w(f) \text{ (PSD)}$$

$$G_x(f) = \lim_{T \rightarrow \infty} \frac{|X_T(f)|^2}{T} \text{ (PSD)}$$

$$G_x(f) = \mathfrak{F}[R_x(\tau)] \text{ (WSS)}$$

$$P = \sigma^2 = \int_{\mathbb{R}} G_x(f) df$$

$$P = \sigma^2 = \lim_{t \rightarrow \infty} \frac{1}{T} \int_{-T/2}^{T/2} |x(t)|^2 dt$$

$$P[A \cos(2\pi ft + \phi)] = \frac{A^2}{2} \text{ Power of sinusoid}$$

$$E = \int_{-\infty}^{\infty} |x(t)|^2 dt = |X(f)|^2$$

$$R_x(\tau) = \mathfrak{F}(G_x(f)) \text{ PSD to Autocorrelation}$$

Noise performance

$$\text{CNR}_{\text{in}} = \frac{P_{\text{in}}}{P_{\text{noise}}}$$

$$\text{CNR}_{\text{in,FM}} = \frac{A^2}{2WN_0}$$

$$\text{SNR}_{\text{FM}} = \frac{3A^2 k_f^2 P}{2N_0 W^3}$$

$$\text{SNR}(\text{dB}) = 10 \log_{10}(\text{SNR}) \text{ Decibels from ratio}$$

Sampling

$$t = nT_s$$

$$T_s = \frac{1}{f_s}$$

$$x_s(t) = x(t)\delta_s(t) = x(t) \sum_{n \in \mathbb{Z}} \delta(t - nT_s) = \sum_{n \in \mathbb{Z}} x(nT_s)\delta(t - nT_s)$$

$$X_s(f) = X(f) * \sum_{n \in \mathbb{Z}} \delta\left(f - \frac{n}{T_s}\right) = X(f) * \sum_{n \in \mathbb{Z}} \delta(f - nf_s)$$

$$B > \frac{1}{2}f_s, 2B > f_s \rightarrow \text{Aliasing}$$

Procedure to reconstruct sampled signal

Analog signal $x'(t)$ which can be reconstructed from a sampled signal $x_s(t)$: Put $x_s(t)$ through LPF with maximum frequency of $f_s/2$ and minimum frequency of $-f_s/2$. Anything outside of the BPF will be attenuated, therefore n which results in frequencies outside the BPF will evaluate to 0 and can be ignored.

Example: $f_s = 5000 \implies \text{LPF} \in [-2500, 2500]$

Then iterate for $n = 0, 1, -1, 2, -2, \dots$ until the first iteration where the result is 0 since all terms are eliminated by the LPF.

TODO: Add example

Then add all terms and transform $\bar{X}_s(f)$ back to time domain to get $x_s(t)$

Fourier transform of continuous time periodic signal (1)

Required for some questions on **sampling**:

Transform a continuous time-periodic signal $x_p(t) = \sum_{n=-\infty}^{\infty} x(t - nT_s)$ with period T_s :

$$X_p(f) = \sum_{n=-\infty}^{\infty} C_n \delta(f - nf_s) \quad f_s = \frac{1}{T_s}$$


Calculate C_n coefficient as follows from $x_p(t)$:

$$C_n = \frac{1}{T_s} \int_{T_s} x_p(t) \exp(-j2\pi f_s t) dt$$

$$= \frac{1}{T_s} X(nf_s) \quad (\text{TODO: Check}) \quad x(t - nT_s) \text{ is contained in the interval } T_s$$

Nyquist criterion for zero-ISI

Do not transmit more than $2B$ samples per second over a channel of B bandwidth.

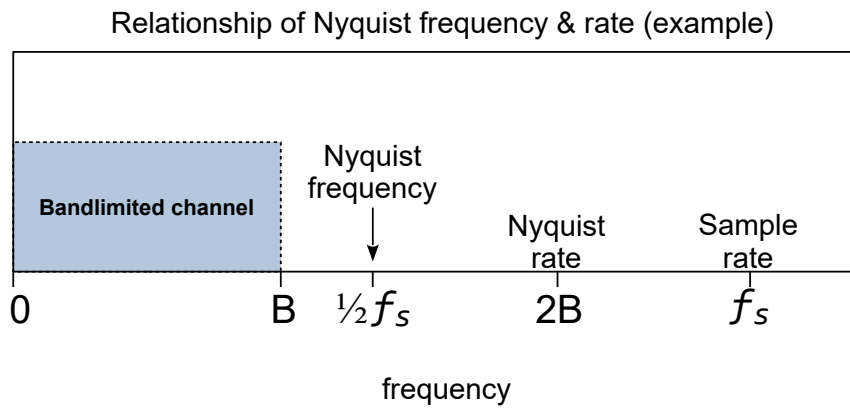

Insert here figure 8.3 from M F Mesiya - Contemporary Communication Systems (Add image to images/sampling.png)

Cannot add directly due to copyright!

sampling

Quantizer

$$\Delta = \frac{x_{\text{Max}} - x_{\text{Min}}}{2^k} \quad \text{for } k\text{-bit quantizer (V/lsb)}$$

Quantization noise

$$e := y - x \quad \text{Quantization error}$$

$$\mu_E = E[E] = 0 \quad \text{Zero mean}$$

$$\sigma_E^2 = E[E^2] - 0^2 = \int_{-\Delta/2}^{\Delta/2} e^2 \times \left(\frac{1}{\Delta}\right) de \quad \text{Where } E \sim 1/\Delta \text{ uniform over } (-\Delta/2, \Delta/2)$$

$$\text{SQNR} = \frac{\text{Signal power}}{\text{Quantization noise}}$$


$$\text{SQNR(dB)} = 10 \log_{10}(\text{SQNR})$$

Insert here figure 8.17 from M F Mesiya - Contemporary Communication Systems (Add image to images/quantizer.png)

Cannot add directly due to copyright!

quantizer

Line codes

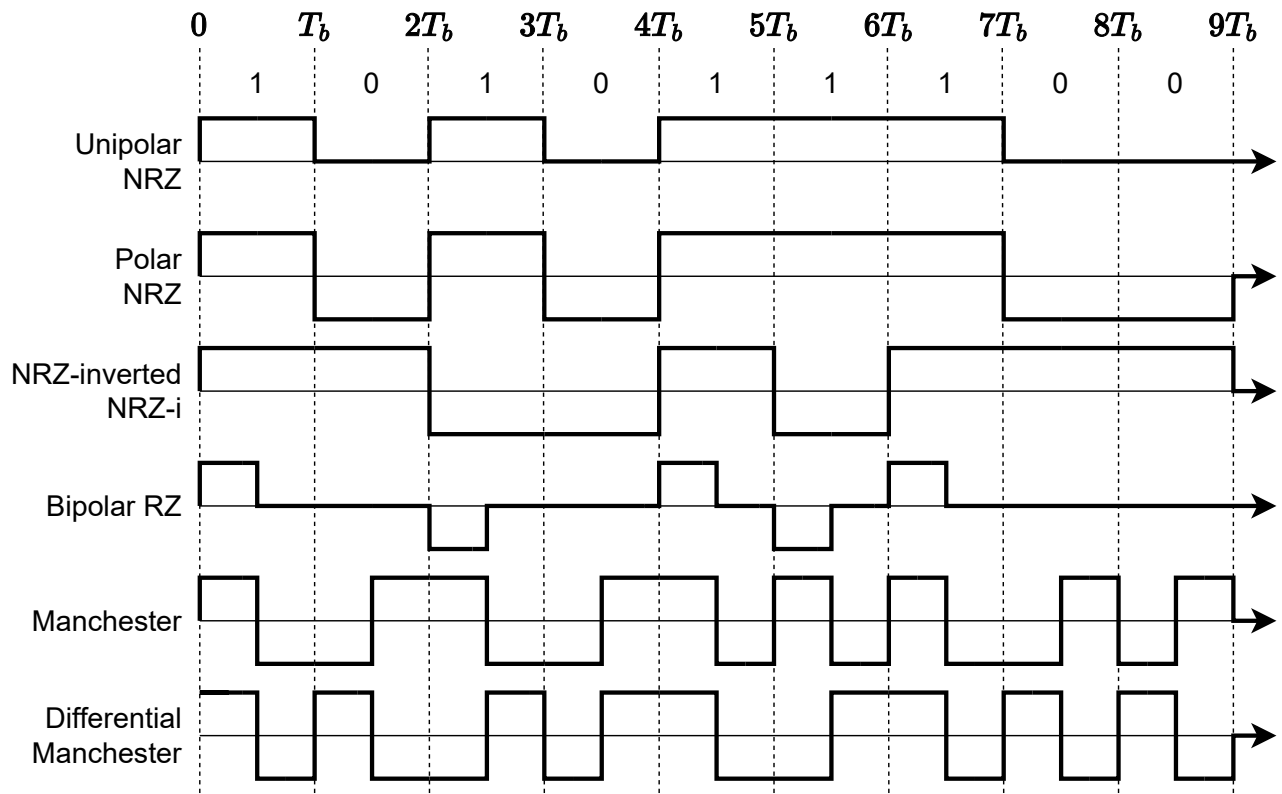

$R_b \rightarrow$ Bit rate

$D \rightarrow$ Symbol rate $|R_d| 1/T_b$

$A \rightarrow m_a$

$V(f) \rightarrow$ Pulse shape

$$V_{\text{rectangle}}(f) = T \text{sinc}(fT \times \text{DutyCycle})$$

$$G_{\text{MunipolarNRZ}}(f) = \frac{(M^2 - 1)A^2D}{12} |V(f)|^2 + \frac{(M - 1)^2}{4} (DA)^2 \sum_{l=-\infty}^{\infty} |V(lD)|^2 \delta(f - lD)$$

$$G_{\text{MpolarNRZ}}(f) = \frac{(M^2 - 1)A^2D}{3} |V(f)|^2$$

$$G_{\text{unipolarNRZ}}(f) = \frac{A^2}{4R_b} \left(\text{sinc}^2 \left(\frac{f}{R_b} \right) + R_b \delta(f) \right), \text{NB}_0 = R_b$$


$$G_{\text{polarNRZ}}(f) = \frac{A^2}{R_b} \text{sinc}^2 \left(\frac{f}{R_b} \right)$$

$$G_{\text{unipolarNRZ}}(f) = \frac{A^2}{4R_b} \left(\text{sinc}^2 \left(\frac{f}{R_b} \right) + R_b \delta(f) \right)$$


$$G_{\text{unipolarRZ}}(f) = \frac{A^2}{16} \left(\sum_{l=-\infty}^{\infty} \delta \left(f - \frac{l}{T_b} \right) |\text{sinc}(\text{duty} \times l)|^2 + T_b |\text{sinc}(\text{duty} \times fT_b)|^2 \right), \text{NB}_0 = 2R_b$$

Modulation and basis functions


BASK constellation

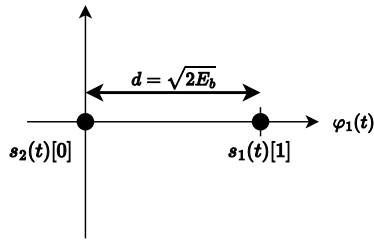

BPSK constellation

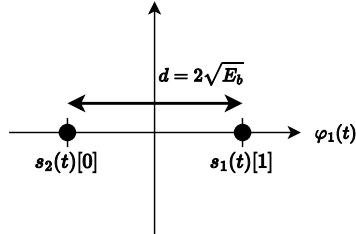

QPSK constellation

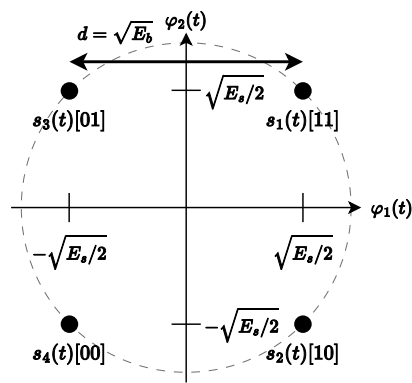

BASK

Basis functions

$$\varphi_1(t) = \sqrt{\frac{2}{T_b}} \cos(2\pi f_c t) \quad 0 \leq t \leq T_b$$

Symbol mapping

$$b_n : \{1, 0\} \rightarrow a_n : \{1, 0\}$$

2 possible waveforms

$$s_1(t) = A_c \sqrt{\frac{T_b}{2}} \varphi_1(t) = \sqrt{2E_b} \varphi_1(t)$$

$$s_2(t) = 0$$

$$\text{Since } E_b = E_{\text{average}} = \frac{1}{2} \left(\frac{A_c^2}{2} \times T_b + 0 \right) = \frac{A_c^2}{4} T_b$$

Distance is $d = \sqrt{2E_b}$

BPSK

Basis functions

$$\varphi_1(t) = \sqrt{\frac{2}{T_b}} \cos(2\pi f_c t) \quad 0 \leq t \leq T_b$$

Symbol mapping

$$b_n : \{1, 0\} \rightarrow a_n : \{1, -1\}$$

2 possible waveforms

$$s_1(t) = A_c \sqrt{\frac{T_b}{2}} \varphi_1(t) = \sqrt{E_b} \varphi_1(t)$$

$$s_2(t) = -A_c \sqrt{\frac{T_b}{2}} \varphi_1(t) = -\sqrt{E_b} \varphi_1(t)$$

$$\text{Since } E_b = E_{\text{average}} = \frac{1}{2} \left(\frac{A_c^2}{2} \times T_b + \frac{A_c^2}{2} \times T_b \right) = \frac{A_c^2}{2} T_b$$

Distance is $d = 2\sqrt{E_b}$

QPSK ($M = 4$ PSK)

Basis functions

$T = 2T_b$ Time per symbol for two bits T_b

$$\varphi_1(t) = \sqrt{\frac{2}{T}} \cos(2\pi f_c t) \quad 0 \leq t \leq T$$

$$\varphi_2(t) = \sqrt{\frac{2}{T}} \sin(2\pi f_c t) \quad 0 \leq t \leq T$$

4 possible waveforms

$$s_1(t) = \sqrt{E_s/2} [\varphi_1(t) + \varphi_2(t)]$$

$$s_2(t) = \sqrt{E_s/2} [\varphi_1(t) - \varphi_2(t)]$$

$$s_3(t) = \sqrt{E_s/2} [-\varphi_1(t) + \varphi_2(t)]$$

$$s_4(t) = \sqrt{E_s/2} [-\varphi_1(t) - \varphi_2(t)]$$

Note on energy per symbol: Since $|s_i(t)| = A_c$, have to normalize distance as follows:

$$\begin{aligned} s_i(t) &= A_c \sqrt{T/2} / \sqrt{2} \times [\alpha_{1i} \varphi_1(t) + \alpha_{2i} \varphi_2(t)] \\ &= \sqrt{T A_c^2 / 4} [\alpha_{1i} \varphi_1(t) + \alpha_{2i} \varphi_2(t)] \\ &= \sqrt{E_s/2} [\alpha_{1i} \varphi_1(t) + \alpha_{2i} \varphi_2(t)] \end{aligned}$$

Signal

Symbol mapping: $\{1, 0\} \rightarrow \{1, -1\}$

$$I(t) = b_{2n} \varphi_1(t) \quad \text{Even bits}$$

$$Q(t) = b_{2n+1} \varphi_2(t) \quad \text{Odd bits}$$

$$x(t) = A_c [I(t) \cos(2\pi f_c t) - Q(t) \sin(2\pi f_c t)]$$

Example of waveform

► Code

Remember that $T = 2T_b$

b_n	QPSK bits
$I(t)$ (Odd, 1st bits)	QPSK bits
$Q(t)$ (Even, 2nd bits)	QPSK bits

Matched filter

1. Filter function

Find transfer function $h(t)$ of matched filter and apply to an input:

$$h(t) = s_1(T - t) - s_2(T - t)$$

$$h(t) = s^*(T - t) \quad ((\cdot)^* \text{ is the conjugate})$$

$$s_{on}(t) = h(t) * s_n(t) = \int_{-\infty}^{\infty} h(\tau) s_n(t - \tau) d\tau \quad \text{Filter output}$$

$$n_o(t) = h(t) * n(t) \quad \text{Noise at filter output}$$

2. Bit error rate

Bit error rate (BER) from matched filter outputs and filter output noise

$$Q(x) = \frac{1}{2} - \frac{1}{2} \operatorname{erf}\left(\frac{x}{\sqrt{2}}\right) \Leftrightarrow \operatorname{erf}\left(\frac{x}{\sqrt{2}}\right) = 1 - 2Q(x)$$

$$E_b = d^2 = \int_{-\infty}^{\infty} |s_1(t) - s_2(t)|^2 dt \quad \text{Energy per bit/Distance}$$

$$T = 1/R_b \quad R_b: \text{Bitrate}$$

$$E_b = P_{\text{av}} T = P_{\text{av}} / R_b \quad \text{Energy per bit}$$

$$P_{\text{av}} = E_b / T = E_b R_b \quad \text{Average power}$$

$$P(W) = 10^{\frac{P(\text{dB})}{10}}$$

$$P_{\text{RX}}(W) = P_{\text{TX}}(W) \cdot 10^{\frac{P_{\text{loss}}(\text{dB})}{10}} \quad P_{\text{loss}} \text{ is expressed with negative sign e.g. "-130 dB"}$$

$$\text{BER}_{\text{MatchedFilter}} = Q\left(\sqrt{\frac{d^2}{2N_0}}\right) = Q\left(\sqrt{\frac{E_b}{2N_0}}\right)$$

$$\text{BER}_{\text{unipolarNRZ|BASK}} = Q\left(\sqrt{\frac{d^2}{N_0}}\right) = Q\left(\sqrt{\frac{E_b}{N_0}}\right)$$

$$\text{BER}_{\text{polarNRZ|BPSK}} = Q\left(\sqrt{\frac{2d^2}{N_0}}\right) = Q\left(\sqrt{\frac{2E_b}{N_0}}\right)$$

Value tables for erf(x) and $Q(x)$

$Q(x)$ function

x	$Q(x)$	x	$Q(x)$	x	$Q(x)$	x	$Q(x)$
0.00	0.5	2.30	0.010724	4.55	2.6823×10^{-6}	6.80	5.231×10^{-12}
0.05	0.48006	2.35	0.0093867	4.60	2.1125×10^{-6}	6.85	3.6925×10^{-12}
0.10	0.46017	2.40	0.0081975	4.65	1.6597×10^{-6}	6.90	2.6001×10^{-12}
0.15	0.44038	2.45	0.0071428	4.70	1.3008×10^{-6}	6.95	1.8264×10^{-12}
0.20	0.42074	2.50	0.0062097	4.75	1.0171×10^{-6}	7.00	1.2798×10^{-12}
0.25	0.40129	2.55	0.0053861	4.80	7.9333×10^{-7}	7.05	8.9459×10^{-13}
0.30	0.38209	2.60	0.0046612	4.85	6.1731×10^{-7}	7.10	6.2378×10^{-13}
0.35	0.36317	2.65	0.0040246	4.90	4.7918×10^{-7}	7.15	4.3389×10^{-13}
0.40	0.34458	2.70	0.003467	4.95	3.7107×10^{-7}	7.20	3.0106×10^{-13}
0.45	0.32636	2.75	0.0029798	5.00	2.8665×10^{-7}	7.25	2.0839×10^{-13}
0.50	0.30854	2.80	0.0025551	5.05	2.2091×10^{-7}	7.30	1.4388×10^{-13}
0.55	0.29116	2.85	0.002186	5.10	1.6983×10^{-7}	7.35	9.9103×10^{-14}
0.60	0.27425	2.90	0.0018658	5.15	1.3024×10^{-7}	7.40	6.8092×10^{-14}
0.65	0.25785	2.95	0.0015889	5.20	9.9644×10^{-8}	7.45	4.667×10^{-14}
0.70	0.24196	3.00	0.0013499	5.25	7.605×10^{-8}	7.50	3.1909×10^{-14}
0.75	0.22663	3.05	0.0011442	5.30	5.7901×10^{-8}	7.55	2.1763×10^{-14}
0.80	0.21186	3.10	0.0009676	5.35	4.3977×10^{-8}	7.60	1.4807×10^{-14}
0.85	0.19766	3.15	0.00081635	5.40	3.332×10^{-8}	7.65	1.0049×10^{-14}
0.90	0.18406	3.20	0.00068714	5.45	2.5185×10^{-8}	7.70	6.8033×10^{-15}
0.95	0.17106	3.25	0.00057703	5.50	1.899×10^{-8}	7.75	4.5946×10^{-15}
1.00	0.15866	3.30	0.00048342	5.55	1.4283×10^{-8}	7.80	3.0954×10^{-15}
1.05	0.14686	3.35	0.00040406	5.60	1.0718×10^{-8}	7.85	2.0802×10^{-15}
1.10	0.13567	3.40	0.00033693	5.65	8.0224×10^{-9}	7.90	1.3945×10^{-15}
1.15	0.12507	3.45	0.00028029	5.70	5.9904×10^{-9}	7.95	9.3256×10^{-16}
1.20	0.11507	3.50	0.00023263	5.75	4.4622×10^{-9}	8.00	6.221×10^{-16}
1.25	0.10565	3.55	0.00019262	5.80	3.3157×10^{-9}	8.05	4.1397×10^{-16}
1.30	0.0968	3.60	0.00015911	5.85	2.4579×10^{-9}	8.10	2.748×10^{-16}
1.35	0.088508	3.65	0.00013112	5.90	1.8175×10^{-9}	8.15	1.8196×10^{-16}
1.40	0.080757	3.70	0.0001078	5.95	1.3407×10^{-9}	8.20	1.2019×10^{-16}
1.45	0.073529	3.75	8.8417×10^{-5}	6.00	9.8659×10^{-10}	8.25	7.9197×10^{-17}
1.50	0.066807	3.80	7.2348×10^{-5}	6.05	7.2423×10^{-10}	8.30	5.2056×10^{-17}
1.55	0.060571	3.85	5.9059×10^{-5}	6.10	5.3034×10^{-10}	8.35	3.4131×10^{-17}
1.60	0.054799	3.90	4.8096×10^{-5}	6.15	3.8741×10^{-10}	8.40	2.2324×10^{-17}
1.65	0.049471	3.95	3.9076×10^{-5}	6.20	2.8232×10^{-10}	8.45	1.4565×10^{-17}
1.70	0.044565	4.00	3.1671×10^{-5}	6.25	2.0523×10^{-10}	8.50	9.4795×10^{-18}
1.75	0.040059	4.05	2.5609×10^{-5}	6.30	1.4882×10^{-10}	8.55	6.1544×10^{-18}
1.80	0.03593	4.10	2.0658×10^{-5}	6.35	1.0766×10^{-10}	8.60	3.9858×10^{-18}
1.85	0.032157	4.15	1.6624×10^{-5}	6.40	7.7688×10^{-11}	8.65	2.575×10^{-18}
1.90	0.028717	4.20	1.3346×10^{-5}	6.45	5.5925×10^{-11}	8.70	1.6594×10^{-18}
1.95	0.025588	4.25	1.0689×10^{-5}	6.50	4.016×10^{-11}	8.75	1.0668×10^{-18}

x	$Q(x)$	x	$Q(x)$	x	$Q(x)$	x	$Q(x)$
2.00	0.02275	4.30	8.5399×10^{-6}	6.55	2.8769×10^{-11}	8.80	6.8408×10^{-19}
2.05	0.020182	4.35	6.8069×10^{-6}	6.60	2.0558×10^{-11}	8.85	4.376×10^{-19}
2.10	0.017864	4.40	5.4125×10^{-6}	6.65	1.4655×10^{-11}	8.90	2.7923×10^{-19}
2.15	0.015778	4.45	4.2935×10^{-6}	6.70	1.0421×10^{-11}	8.95	1.7774×10^{-19}
2.20	0.013903	4.50	3.3977×10^{-6}	6.75	7.3923×10^{-12}	9.00	1.1286×10^{-19}
2.25	0.012224						

Adapted from table 6.1 M F Mesiya - Contemporary Communication Systems

erf(x) function

x	erf(x)	x	erf(x)	x	erf(x)
0.00	0.00000	0.75	0.71116	1.50	0.96611
0.05	0.05637	0.80	0.74210	1.55	0.97162
0.10	0.11246	0.85	0.77067	1.60	0.97635
0.15	0.16800	0.90	0.79691	1.65	0.98038
0.20	0.22270	0.95	0.82089	1.70	0.98379
0.25	0.27633	1.00	0.84270	1.75	0.98667
0.30	0.32863	1.05	0.86244	1.80	0.98909
0.35	0.37938	1.10	0.88021	1.85	0.99111
0.40	0.42839	1.15	0.89612	1.90	0.99279
0.45	0.47548	1.20	0.91031	1.95	0.99418
0.50	0.52050	1.25	0.92290	2.00	0.99532
0.55	0.56332	1.30	0.93401	2.50	0.99959
0.60	0.60386	1.35	0.94376	3.00	0.99998
0.65	0.64203	1.40	0.95229	3.30	0.999998**
0.70	0.67780	1.45	0.95970		

**The value of erf(3.30) should be ≈ 0.999997 instead, but this value is quoted in the formula table.

Receiver output shift

$$r_o(t) = \begin{cases} s_{o1}(t) + n_o(t) & \text{code 1} \\ s_{o2}(t) + n_o(t) & \text{code 0} \end{cases}$$

n : AWGN with σ_o^2

ISI, channel model


Nyquist criterion for zero ISI

TODO:

Nomenclature

- $D \rightarrow$ Symbol Rate, Max. Signalling Rate
- $T \rightarrow$ Symbol Duration
- $M \rightarrow$ Symbol set size
- $W \rightarrow$ Bandwidth

Raised cosine (RC) pulse

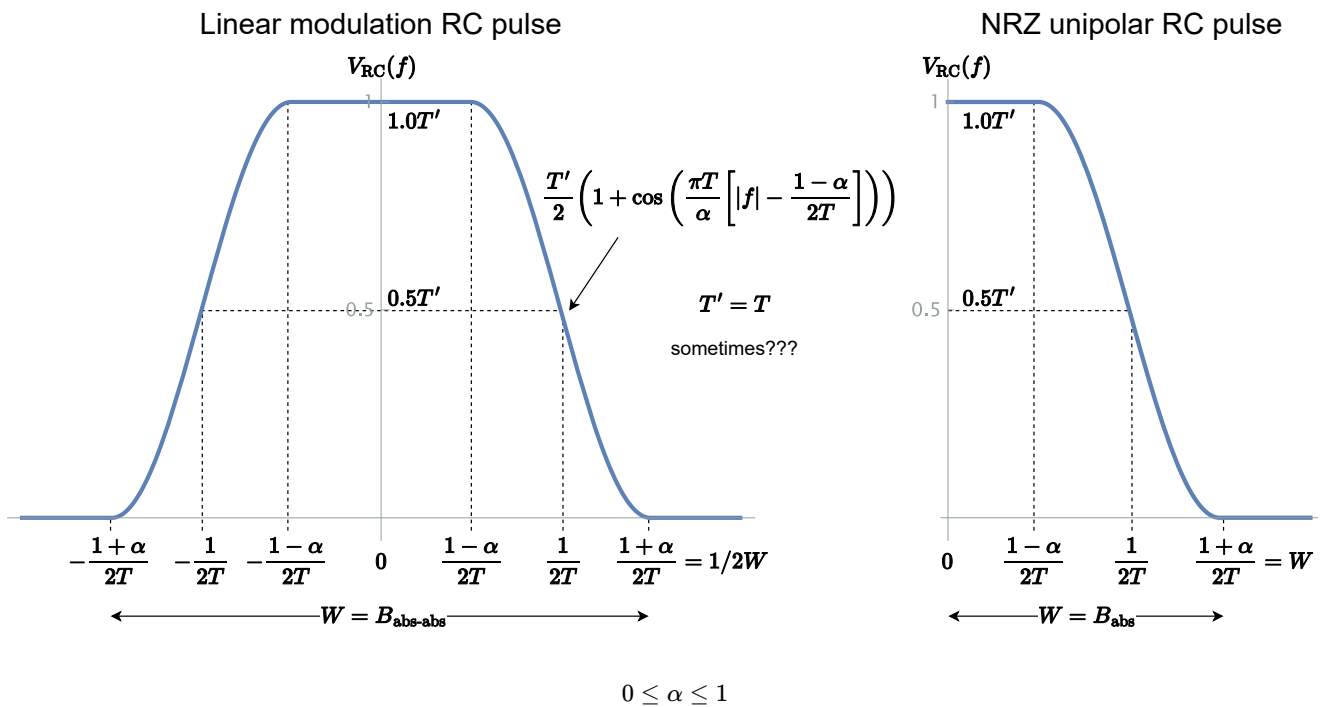

△ NOTE might not be safe to assume $T' = T$, if you can solve the question without T then use that method.

To solve this type of question:

1. Use the formula for D below
2. Consult the BER table below to get the BER which relates the noise of the channel N_0 to E_b and to R_b .

Linear modulation (M -PSK, BPSK, M -QAM) NRZ unipolar encoding, BASK

$W = B_{\text{abs-abs}}$	$W = B_{\text{abs}}$
$W = B_{\text{abs-abs}} = \frac{1+\alpha}{T} = (1+\alpha)D$	$W = B_{\text{abs}} = \frac{1+\alpha}{2T} = (1+\alpha)D/2$
$D = \frac{W \text{ symbol/s}}{1+\alpha}$	$D = \frac{2W \text{ symbol/s}}{1+\alpha}$
$R_b \text{ bit/s} = (D \text{ symbol/s}) \times (k \text{ bit/symbol})$	
$M \text{ symbol/set} = 2^k$	
$E_b = PT = P_{\text{av}}/R_b \quad \text{Energy per bit}$	

Nyquist stuff

TODO: Condition for 0 ISI

$$P_r(kT) = \begin{cases} 1 & k = 0 \\ 0 & k \neq 0 \end{cases}$$

Other

$$\begin{aligned} \text{Excess BW} &= B_{\text{abs}} - B_{\text{Nyquist}} = \frac{1 + \alpha}{2T} - \frac{1}{2T} = \frac{\alpha}{2T} \quad \text{FOR NRZ (Use correct } B_{\text{abs}}) \\ \alpha &= \frac{\text{Excess BW}}{B_{\text{Nyquist}}} = \frac{B_{\text{abs}} - B_{\text{Nyquist}}}{B_{\text{Nyquist}}} \\ T &= 1/D \end{aligned}$$

Table of bandpass signalling and BER

Binary Bandpass Signaling	$B_{\text{null-null}}$ (Hz)	$B_{\text{abs-abs}} = 2B_{\text{abs}}$ (Hz)	BER with Coherent Detection	BER with Noncoherent Detection
ASK, unipolar NRZ	$2R_b$	$R_b(1 + \alpha)$	$Q\left(\sqrt{E_b/N_0}\right)$	$0.5 \exp(-E_b/(2N_0))$
BPSK	$2R_b$	$R_b(1 + \alpha)$	$Q\left(\sqrt{2E_b/N_0}\right)$	Requires coherent detection
Sunde's FSK	$3R_b$		$Q\left(\sqrt{E_b/N_0}\right)$	$0.5 \exp(-E_b/(2N_0))$
DBPSK, M -ary Bandpass Signaling	$2R_b$	$R_b(1 + \alpha)$		$0.5 \exp(-E_b/N_0)$
QPSK/ OQPSK ($M = 4$, PSK)	R_b	$\frac{R_b(1+\alpha)}{2}$	$Q\left(\sqrt{2E_b/N_0}\right)$	Requires coherent detection
MSK	$1.5R_b$	$\frac{3R_b(1+\alpha)}{4}$	$Q\left(\sqrt{2E_b/N_0}\right)$	Requires coherent detection
M -PSK ($M > 4$)	$2R_b / \log_2 M$	$\frac{R_b(1+\alpha)}{\log_2 M}$	$\frac{2}{\log_2 M} Q\left(\sqrt{2 \log_2 M \sin^2(\pi/M) E_b/N_0}\right)$	Requires coherent detection
M -DPSK ($M > 4$)	$2R_b / \log_2 M$	$\frac{R_b(1+\alpha)}{2 \log_2 M}$		$\frac{2}{\log_2 M} Q\left(\sqrt{4 \log_2 M \sin^2(\pi/(2M)) E_b/N_0}\right)$
M -QAM (Square constellation)	$2R_b / \log_2 M$	$\frac{R_b(1+\alpha)}{\log_2 M}$	$\frac{4}{\log_2 M} \left(1 - \frac{1}{\sqrt{M}}\right) Q\left(\sqrt{\frac{3 \log_2 M}{M-1} E_b/N_0}\right)$	Requires coherent detection
M -FSK Coherent	$\frac{(M+3)R_b}{2 \log_2 M}$		$\frac{M-1}{\log_2 M} Q\left(\sqrt{(\log_2 M) E_b/N_0}\right)$	
Noncoherent	$2MR_b / \log_2 M$			$\frac{M-1}{2 \log_2 M} 0.5 \exp(-(\log_2 M) E_b/2N_0)$

Adapted from table 11.4 M F Mesiya - Contemporary Communication Systems

PSD of modulated signals

Modulation	$G_x(f)$
Quadrature	$\frac{A_c^2}{4} [G_I(f - f_c) + G_I(f + f_c) + G_Q(f - f_c) + G_Q(f + f_c)]$
Linear	$\frac{ V(f) ^2}{2} \sum_{l=-\infty}^{\infty} R(l) \exp(-j2\pi l f T)$ What??

Symbol error probability

- Minimum distance between any two point
- Different from bit error since a symbol can contain multiple bits

Information theory

Entropy for discrete random variables

$$\begin{aligned}
H(x) &\geq 0 \\
H(x) &= - \sum_{x_i \in A_x} p_X(x_i) \log_2(p_X(x_i)) \\
H(x, y) &= - \sum_{x_i \in A_x} \sum_{y_i \in A_y} p_{XY}(x_i, y_i) \log_2(p_{XY}(x_i, y_i)) \quad \text{Joint entropy} \\
H(x, y) &= H(x) + H(y) \quad \text{Joint entropy if } x \text{ and } y \text{ independent} \\
H(x|y = y_j) &= - \sum_{x_i \in A_x} p_X(x_i|y = y_j) \log_2(p_X(x_i|y = y_j)) \quad \text{Conditional entropy} \\
H(x|y) &= - \sum_{y_j \in A_y} p_Y(y_j) H(x|y = y_j) \quad \text{Average conditional entropy, equivocation} \\
H(x|y) &= - \sum_{x_i \in A_x} \sum_{y_i \in A_y} p_X(x_i, y_i) \log_2(p_X(x_i|y = y_j)) \\
H(x|y) &= H(x, y) - H(y) \\
H(x, y) &= H(x) + H(y|x) = H(y) + H(x|y)
\end{aligned}$$


Entropy is **maximized** when all have an equal probability.

Differential entropy for continuous random variables

TODO: Cut out if not required

$$h(x) = - \int_{\mathbb{R}} f_X(x) \log_2(f_X(x)) dx$$

Mutual information



Amount of entropy decrease of x after observation by y .

$$I(x; y) = H(x) - H(x|y) = H(y) - H(y|x)$$

Channel model

Vertical, x : input

Horizontal, y : output

$$\mathbf{P} = \begin{bmatrix} p_{11} & p_{12} & \dots & p_{1N} \\ p_{21} & p_{22} & \dots & p_{2N} \\ \vdots & \vdots & \ddots & \vdots \\ p_{M1} & p_{M2} & \dots & p_{MN} \end{bmatrix}$$

$P(y_j x_i)$	y_1	y_2	\dots	y_N
x_1	p_{11}	p_{12}	\dots	p_{1N}
x_2	p_{21}	p_{22}	\dots	p_{2N}
\vdots	\vdots	\vdots	\ddots	\vdots
x_M	p_{M1}	p_{M2}	\dots	p_{MN}

Input has probability distribution $p_X(a_i) = P(X = a_i)$

Channel maps alphabet $\{a_1, \dots, a_M\} \rightarrow \{b_1, \dots, b_N\}$

Output has probability distribution $p_Y(b_j) = P(y = b_j)$

$$\begin{aligned}
 p_Y(b_j) &= \sum_{i=1}^M P[x = a_i, y = b_j] \quad 1 \leq j \leq N \\
 &= \sum_{i=1}^M P[X = a_i]P[Y = b_j|X = a_i] \\
 [p_Y(b_0) \quad p_Y(b_1) \quad \dots \quad p_Y(b_j)] &= [p_X(a_0) \quad p_X(a_1) \quad \dots \quad p_X(a_i)] \times \mathbf{P}
 \end{aligned}$$

Fast procedure to calculate $I(y; x)$

1. Find $H(x)$
2. Find $[p_Y(b_0) \quad p_Y(b_1) \quad \dots \quad p_Y(b_j)] = [p_X(a_0) \quad p_X(a_1) \quad \dots \quad p_X(a_i)] \times \mathbf{P}$
3. Multiply each row in \mathbf{P} by $p_X(a_i)$ since $p_{XY}(x_i, y_i) = P(y_i|x_i)P(x_i)$
4. Find $H(x, y)$ using each element from (3.)
5. Find $H(x|y) = H(x, y) - H(y)$
6. Find $I(y; x) = H(x) - H(x|y)$

Channel types

Type	Definition
Symmetric channel	Every row is a permutation of every other row, Every column is a permutation of every other column. Symmetric \implies Weakly symmetric
Weakly symmetric	Every row is a permutation of every other row, Every column has the same sum

Channel capacity of weakly symmetric channel

- $C \rightarrow$ Channel capacity (bits/channels used)
- $N \rightarrow$ Output alphabet size
- $\mathbf{p} \rightarrow$ Probability vector, any row of the transition matrix
- $C = \log_2(N) - H(\mathbf{p})$ Capacity for weakly symmetric and symmetric channels
- $R < C$ for error-free transmission

Channel capacity of an AWGN channel

$$y_i = x_i + n_i \quad n_i \sim N(0, N_0/2)$$

$$C = \frac{1}{2} \log_2 \left(1 + \frac{P_{av}}{N_0/2} \right)$$

Channel capacity of a bandwidth AWGN channel

Note: Define XOR (\oplus) as exclusive OR, or modulo-2 addition.

$$\begin{aligned}
 P_s &\rightarrow \text{Bandwidth limited average power} \\
 y_i &= \text{bandpass}_W(x_i) + n_i \quad n_i \sim N(0, N_0/2) \\
 C &= W \log_2 \left(1 + \frac{P_s}{N_0 W} \right) \\
 C &= W \log_2(1 + \text{SNR}) \quad \text{SNR} = P_s/(N_0 W)
 \end{aligned}$$

Channel code

Hamming weight	$w_H(x)$	Number of '1' in codeword x
Hamming distance	$d_H(x_1, x_2) = w_H(x_1 \oplus x_2)$	Number of different bits between codewords x_1 and x_2 which is the hamming weight of the XOR of the two codes.
Minimum distance	d_{\min}	IMPORTANT: $x \neq \mathbf{0}$, excludes weight of all-zero codeword. For a linear block code, $d_{\min} = w_{\min}$

Linear block code

Code is (n, k)

n is the width of a codeword

2^k codewords

A linear block code must be a subspace and satisfy both:

1. Zero vector must be present at least once
2. The XOR of any codeword pair in the code must result in a codeword that is already present in the code table.

For a linear block code, $d_{\min} = w_{\min}$

Code generation

Each generator vector is a binary string of size n . There are k generator vectors in \mathbf{G} .

$$\begin{aligned} \mathbf{g}_i &= [g_{i,0} \ \dots \ g_{i,n-2} \ g_{i,n-1}] \\ \mathbf{g}_0 &= [1010] \quad \text{Example for } n = 4 \\ \mathbf{G} &= \begin{bmatrix} \mathbf{g}_0 \\ \mathbf{g}_1 \\ \vdots \\ \mathbf{g}_{k-1} \end{bmatrix} = \begin{bmatrix} g_{0,0} & \dots & g_{0,n-2} & g_{0,n-1} \\ g_{1,0} & \dots & g_{1,n-2} & g_{1,n-1} \\ \vdots & \ddots & \vdots & \vdots \\ g_{k-1,0} & \dots & g_{k-1,n-2} & g_{k-1,n-1} \end{bmatrix} \end{aligned}$$

A message block \mathbf{m} is coded as \mathbf{x} using the generation codewords in \mathbf{G} :

$$\begin{aligned} \mathbf{m} &= [m_0 \ \dots \ m_{n-2} \ m_{k-1}] \\ \mathbf{m} &= [101001] \quad \text{Example for } k = 6 \\ \mathbf{x} &= \mathbf{mG} = m_0\mathbf{g}_0 + m_1\mathbf{g}_1 + \dots + m_{k-1}\mathbf{g}_{k-1} \end{aligned}$$

Systemic linear block code

Contains k message bits (Copy \mathbf{m} as-is) and $(n - k)$ parity bits after the message bits.

$$\begin{aligned} \mathbf{G} &= [\mathbf{I}_k \mid \mathbf{P}] = \left[\begin{array}{cccc|cccc} 1 & 0 & \dots & 0 & p_{0,0} & \dots & p_{0,n-2} & p_{0,n-1} \\ 0 & 1 & \dots & 0 & p_{1,0} & \dots & p_{1,n-2} & p_{1,n-1} \\ \vdots & \vdots & \ddots & \vdots & \vdots & \ddots & \vdots & \vdots \\ 0 & 0 & \dots & 1 & p_{k-1,0} & \dots & p_{k-1,n-2} & p_{k-1,n-1} \end{array} \right] \\ \mathbf{m} &= [m_0 \ \dots \ m_{n-2} \ m_{k-1}] \\ \mathbf{x} &= \mathbf{mG} = \mathbf{m} [\mathbf{I}_k \mid \mathbf{P}] = [\mathbf{mI}_k \mid \mathbf{mP}] = [\mathbf{m} \mid \mathbf{b}] \\ \mathbf{b} &= \mathbf{mP} \quad \text{Parity bits of } \mathbf{x} \end{aligned}$$

Parity check matrix \mathbf{H}

Transpose \mathbf{P} for the parity check matrix

$$\begin{aligned} \mathbf{H} &= [\mathbf{P}^T \mid \mathbf{I}_{n-k}] \\ &= [\mathbf{p}_0^T \ \mathbf{p}_1^T \ \dots \ \mathbf{p}_{k-1}^T \mid \mathbf{I}_{n-k}] \\ &= \left[\begin{array}{cccc|cccc} p_{0,0} & \dots & p_{0,k-2} & p_{0,k-1} & 1 & 0 & \dots & 0 \\ p_{1,0} & \dots & p_{1,k-2} & p_{1,k-1} & 0 & 1 & \dots & 0 \\ \vdots & \ddots & \vdots & \vdots & \vdots & \vdots & \ddots & \vdots \\ p_{n-1,0} & \dots & p_{n-1,k-2} & p_{n-1,k-1} & 0 & 0 & \dots & 1 \end{array} \right] \\ \mathbf{xH}^T &= \mathbf{0} \implies \text{Codeword is valid} \end{aligned}$$

Procedure to find parity check matrix from list of codewords

1. From the number of codewords, find $k = \log_2(N)$
2. Partition codewords into k information bits and remaining bits into $n - k$ parity bits. The information bits should be a simple counter (?).
3. Express parity bits as a linear combination of information bits
4. Put coefficients into \mathbf{P} matrix and find \mathbf{H}

Example:

x_1	x_2	x_3	x_4	x_5
1	0	1	1	0
0	1	1	1	1
0	0	0	0	0
1	1	0	0	1

Set x_1, x_2 as information bits. Express x_3, x_4, x_5 in terms of x_1, x_2 .

$$\begin{array}{l}
 x_3 = x_1 \oplus x_2 \\
 x_4 = x_1 \oplus x_2 \\
 x_5 = x_2
 \end{array}
 \implies \mathbf{P} = \begin{array}{c|cc}
 & x_1 & x_2 \\
 \hline
 x_3 & 1 & 1 \\
 x_4 & 1 & 1 \\
 x_5 & 0 & 1
 \end{array}$$

$$\mathbf{H} = \left[\begin{array}{cc|ccc}
 1 & 1 & 1 & 0 & 0 \\
 1 & 1 & 0 & 1 & 0 \\
 0 & 1 & 0 & 0 & 1
 \end{array} \right]$$

Error detection and correction

Detection of s errors: $d_{\min} \geq s + 1$

Correction of u errors: $d_{\min} \geq 2u + 1$

CHECKLIST

- Transfer function in complex envelope form $\tilde{h}(t)$ should be divided by two.
- Convolutions: do not forget width when using graphical method
- todo: add more items to check